



Cisco Support Community Expert Series Webcast:

Simplifying Enterprise QoS with Media Awareness

Eric Yu
Customer Support Engineer

August 21, 2012

Cisco Support Community – Expert Series Webcast

- Today's featured expert is Cisco Support Engineer **Eric Yu**
- Ask him questions now about Medianet.



Eric Yu

- Supports video performance
- 10 years of experience
- CCIE in Routing and Switching

Thank You for Joining Us Today

Today's presentation will include audience polling questions

We encourage you to participate!



Thank You for Joining Us Today

If you would like a copy of the presentation slides, click the PDF link in the chat box on the right or go to

<https://supportforums.cisco.com/docs/DOC-26577>



Polling Question 1

What is your role with supporting the network for voice and Video?

- a) System Engineering
- b) Network Operations
- c) Voice and video Engineering
- d) End user voice or video

Submit Your Questions Now!

Use the Q&A panel to submit your questions. Experts will start responding those





Cisco Support Community Expert Series Webcast:

Simplifying Enterprise QoS with Media Awareness

Eric Yu


Customer Support Engineer

August 21, 2012

Agenda


- **Cisco Medianet Overview**
- **Understanding Medianet Media Awareness**
- **Media Awareness Integration**

Logical Reference Topology

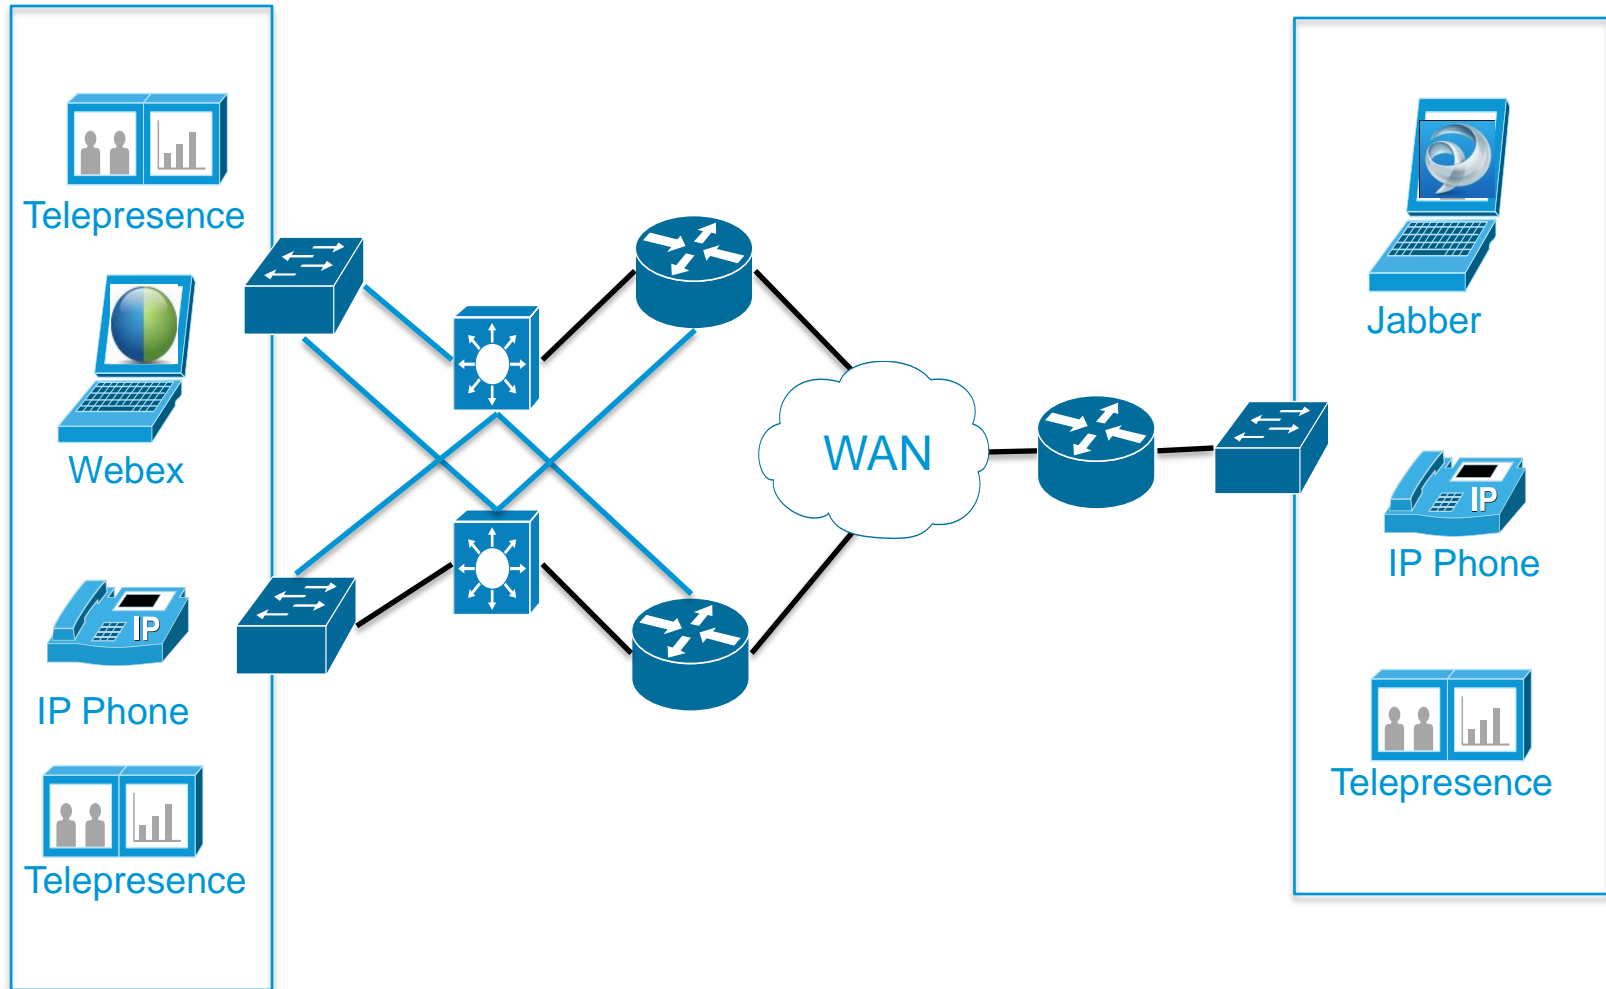

Medianet Hardware Topology Reference


Required Hardware for Medianet

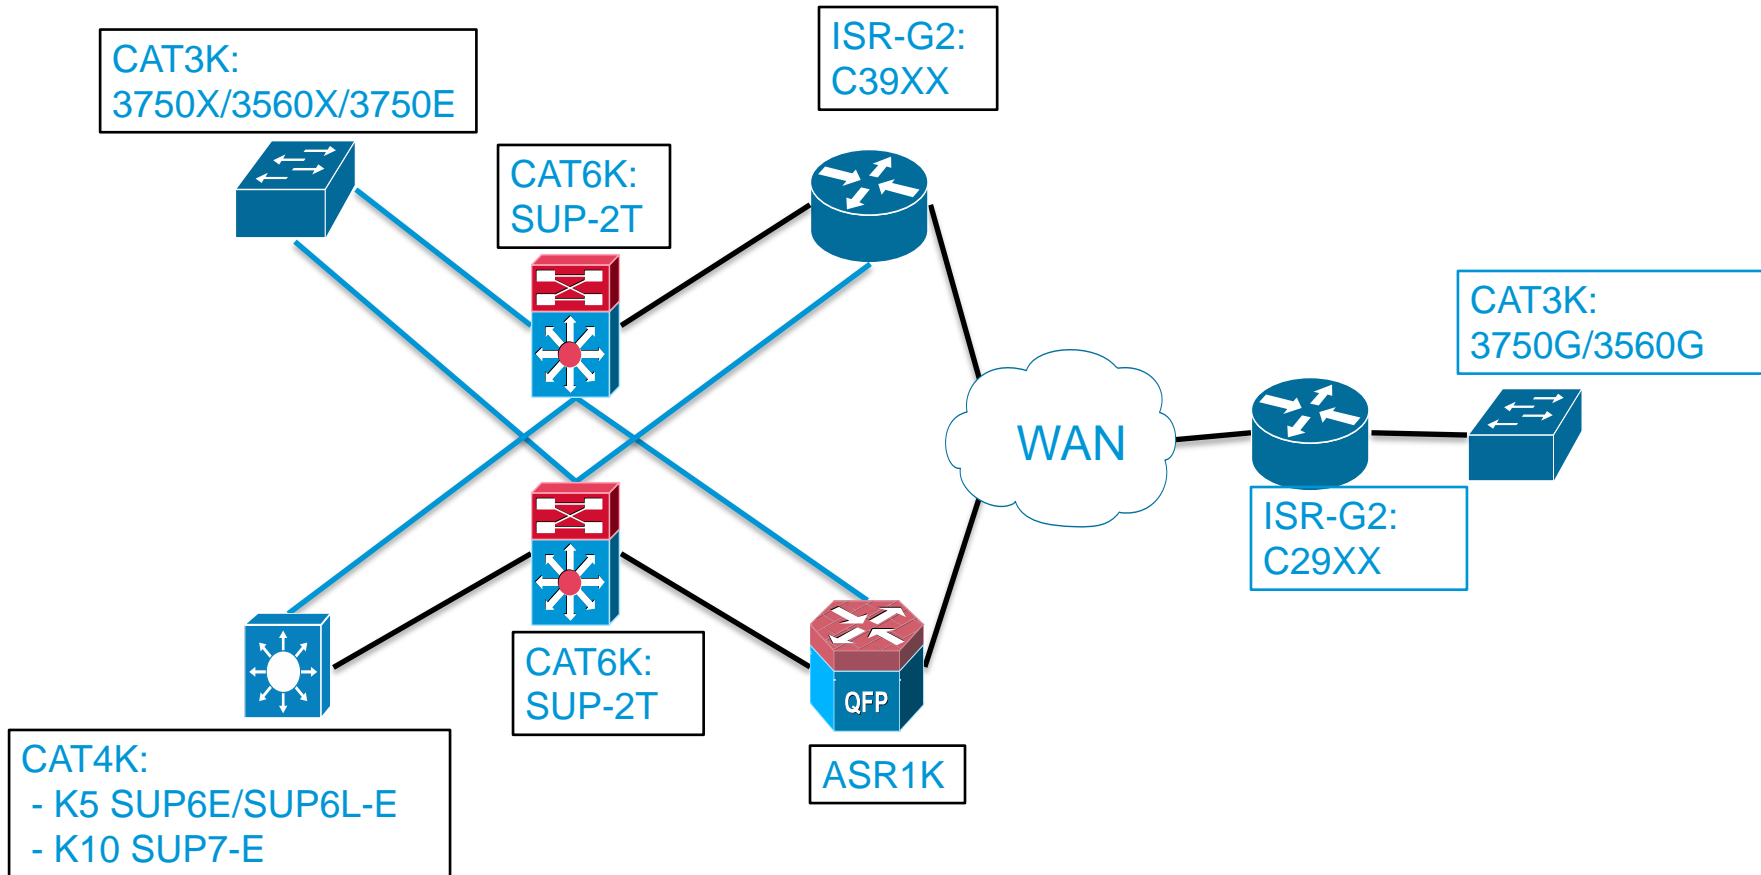

Reference: http://www.cisco.com/en/US/prod/collateral/routers/ps10536/data_sheet_c78-612429.html

Medianet Software Reference

Required Software and License Feature for Medianet Video Monitoring

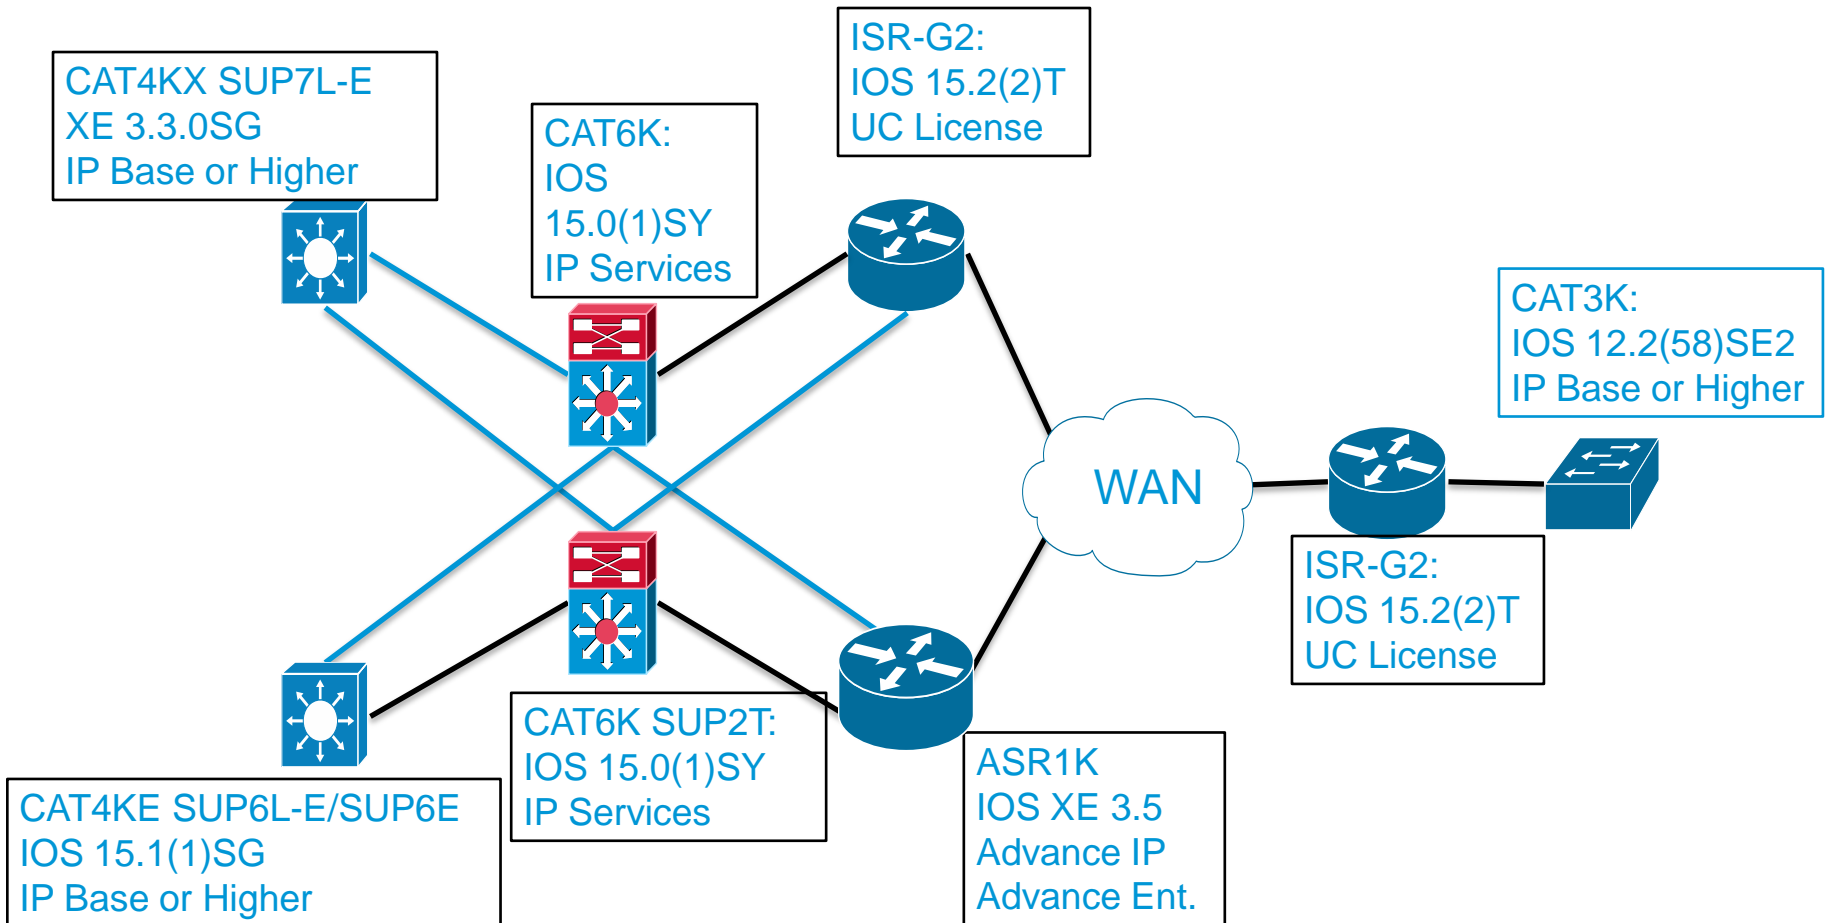

Reference: http://www.cisco.com/en/US/prod/collateral/routers/ps10536/data_sheet_c78-612429.html

Agenda

- **Cisco Medianet Overview**
- Understanding Medianet Media Awareness
- Media Awareness Integration

What is Medianet?



Features

Traffic Simulation



Model impact of video traffic on the network

Metadata



Identify traffic class for network services

Video Monitoring



Monitor network stats for Media streams (TCP/RTP)

Mediatrace




Invoke end-to end, hop-by-hop diagnostics

Converged Multi-Service IP Network

Preserving Quality of Experience

Ensuring End to End QoS

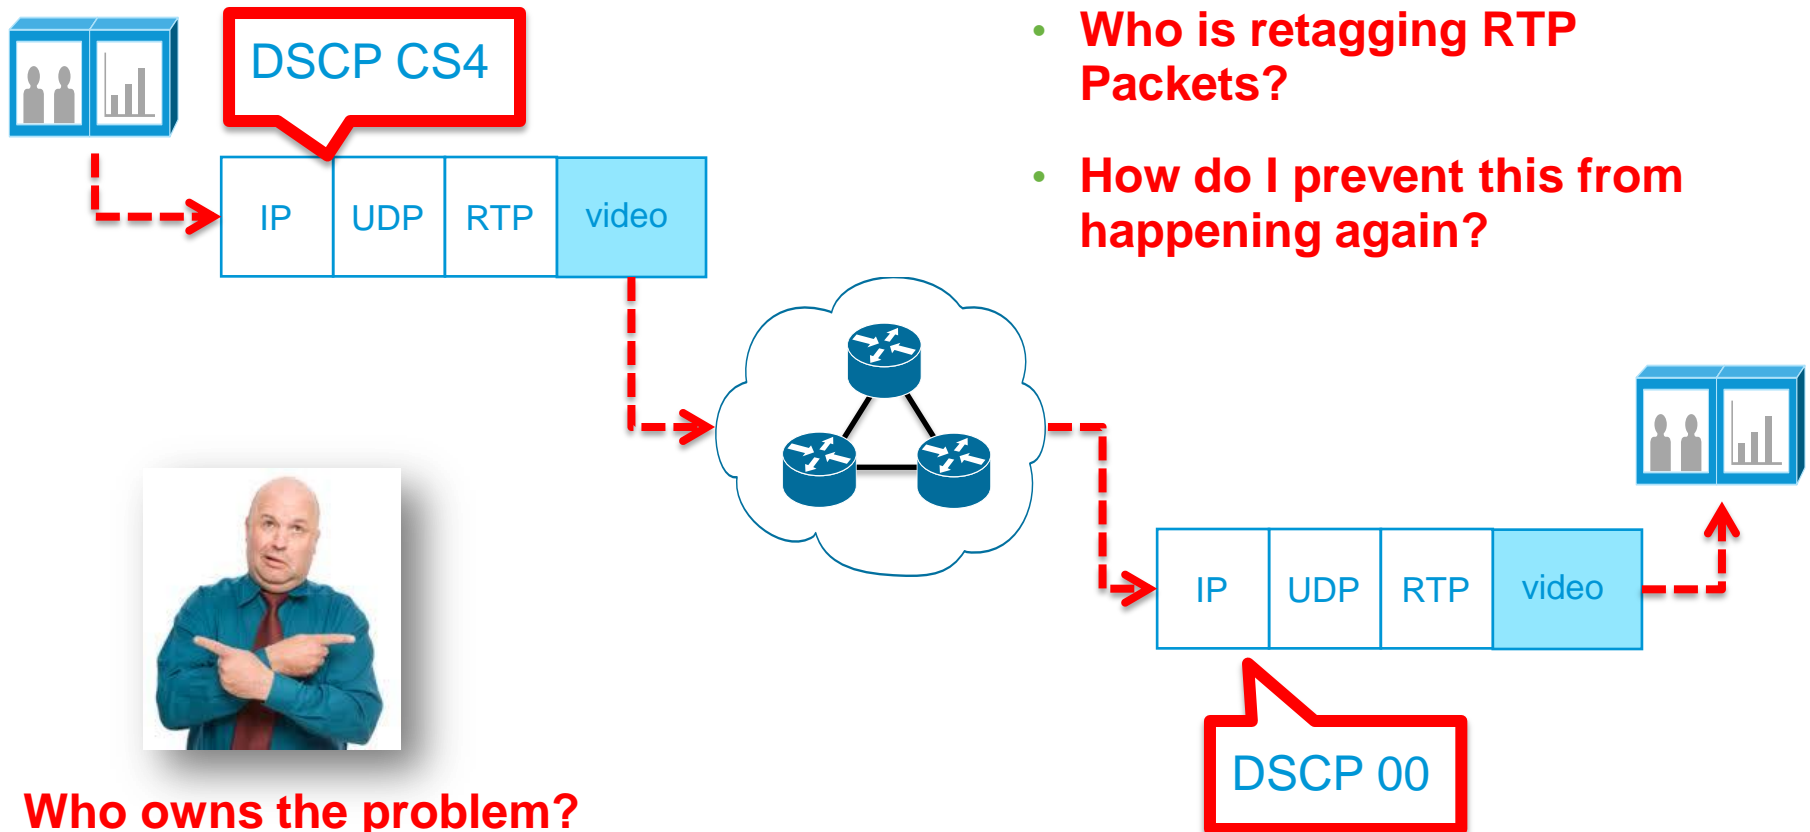


Who owns the problem?

Cisco Medianet DiffServ QoS Recommendations (RFC 4594-Based)

Application Examples	Application Class	Per-Hop Behavior	Queuing & Dropping
Cisco IP Phones (G.711, G.729)	VoIP Telephony	EF	Priority Queue (PQ)
Cisco IP Video Surveillance / Cisco Enterprise TV	Broadcast Video	CS5	(Optional) PQ
Cisco TelePresence	Realtime Interactive	CS4	(Optional) PQ
Cisco Unified Personal Communicator, WebEx	Multimedia Conferencing	AF4	BW Queue + DSCP WRED
Cisco Digital Media System (VoDs)	Multimedia Streaming	AF3	BW Queue + DSCP WRED
EIGRP, OSPF, BGP, HSRP, IKE	Network Control	CS6	BW Queue
SCCP, SIP, H.323	Call-Signaling	CS3	BW Queue
SNMP, SSH, Syslog	Ops / Admin / Mgmt (OAM)	CS2	BW Queue
ERP Apps, CRM Apps, Database Apps	Transactional Data	AF2	BW Queue + DSCP WRED
E-mail, FTP, Backup Apps, Content Distribution	Bulk Data	AF1	BW Queue + DSCP WRED
Default Class	Best Effort	DF	Default Queue + RED
YouTube, iTunes, BitTorrent, Xbox Live	Scavenger	CS1	Min BW Queue (Deferential)

CPL Configuration Example

Configuration

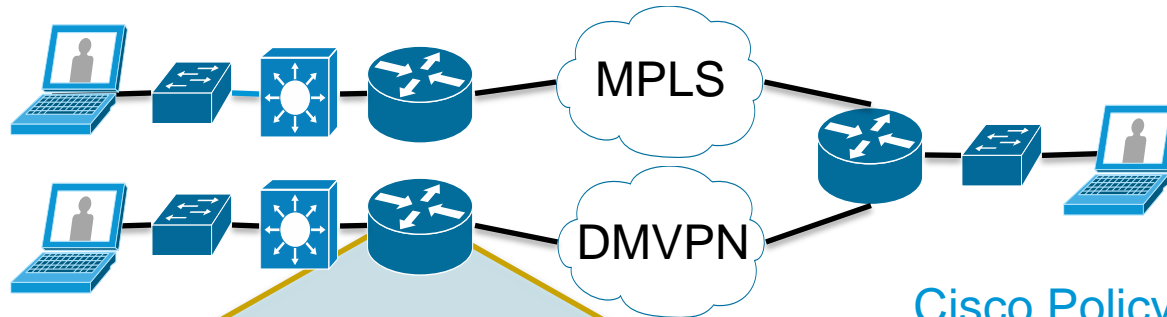

Cisco Policy Language = Class-Map, Policy-Map Configuration Methodology

```
class-map match-all RTP-voice
  match dscp ef
class-map match-any RTP-Video
  match dscp cs4 af31
!
```

Classify traffic based on DSCP, ACL, NBAR


```
policy-map MediaPriority
  class RTP-voice
    priority 512
  class RTP-Video
    bandwidth percent 13
  class class-default
    fair-queue
!
```

Define QoS policy & allocating bandwidth per traffic class

```
interface GigabitEthernet0/0
  ip address 14.50.99.19 255.255.255.240
  service-policy output MediaPriority
```


Apply QoS policy to an interface (inbound or out)

Pervasive Mediatrace Responder

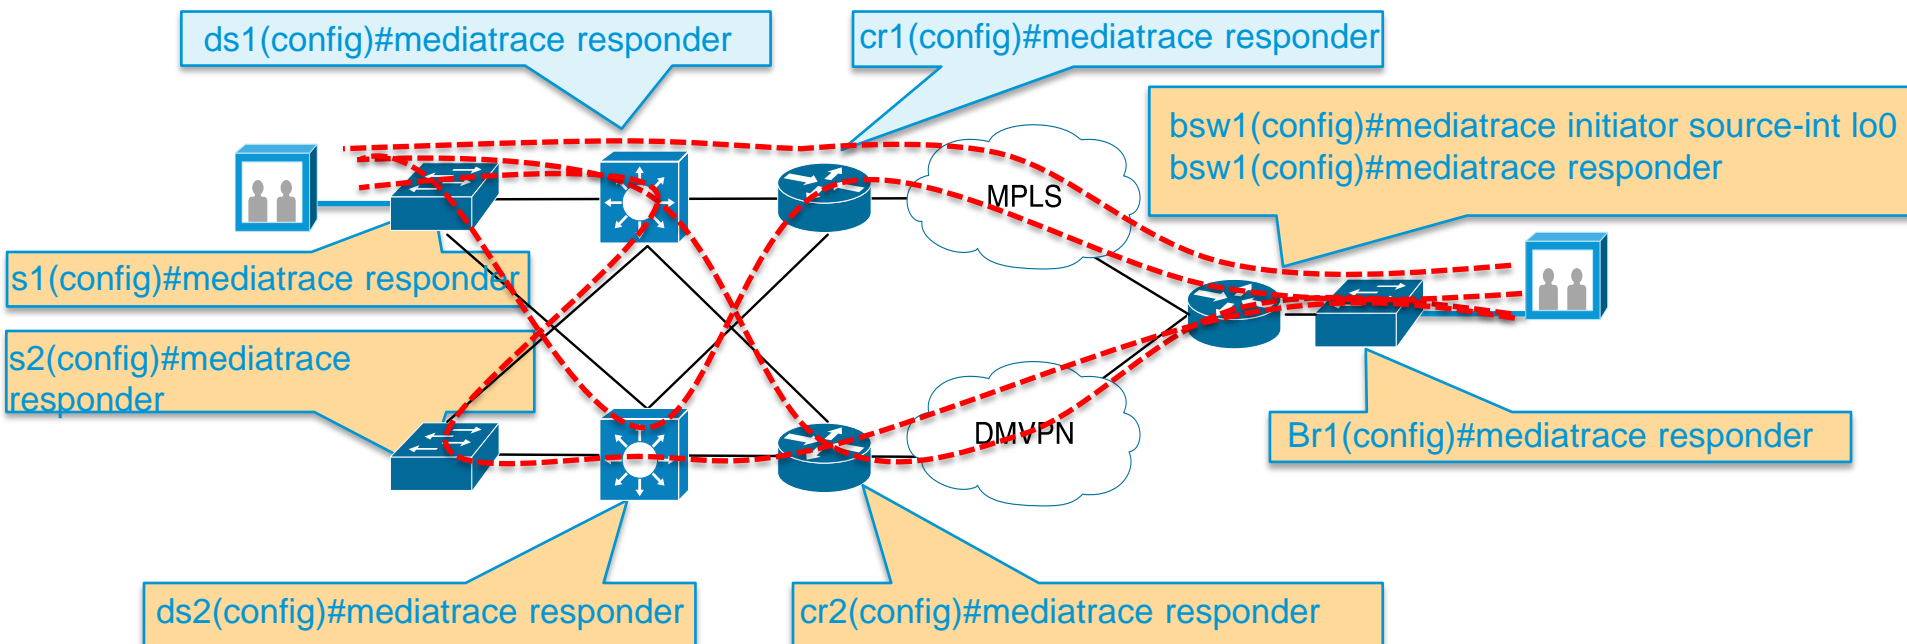

- Regardless of Media Path, responder reports metrics when inquired

Mediatrace RTP Performance Along Path

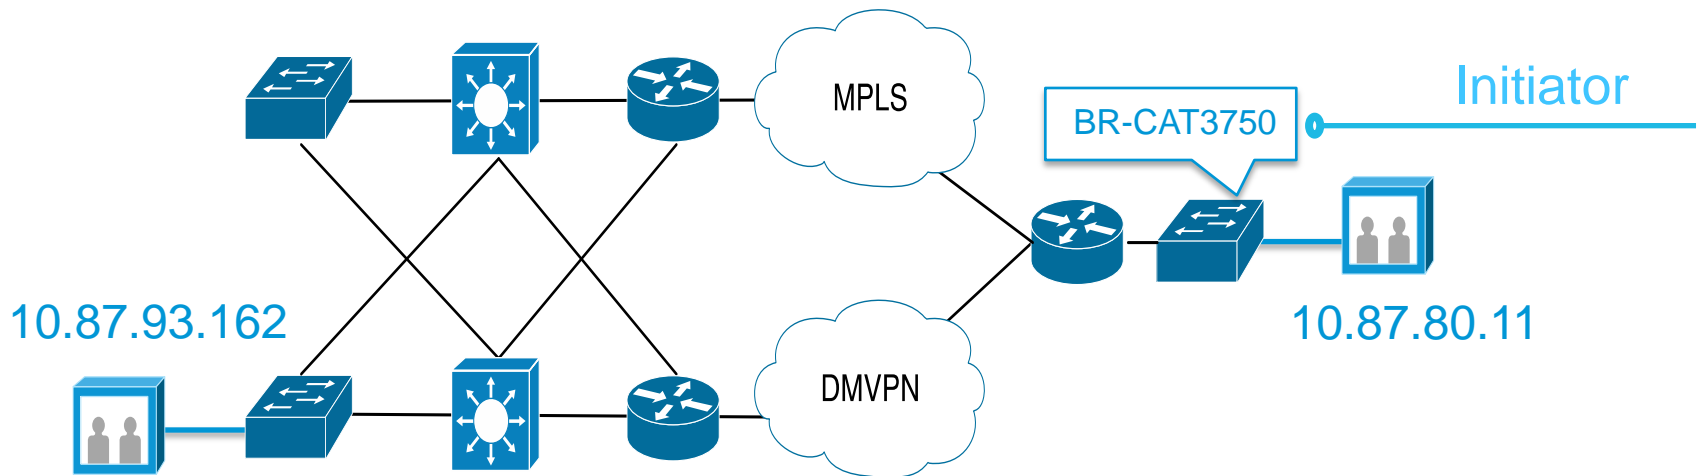

BR-CAT3750#mediatrace poll path source 10.87.80.11 destination 10.87.93.162 perf-mon

Started the data fetch operation.

Waiting for data from hops.

This may take several seconds to complete...

Data received for hop 0

Data received for hop 1


Data received for hop 2

Data fetch complete.

Mediatrace
CAT3750
IOS
12.2(58)SE2


Options
app-health
configless
hops
l2-params
perf-monitor
system

Mediatrace: RSVP Messages as a Transport

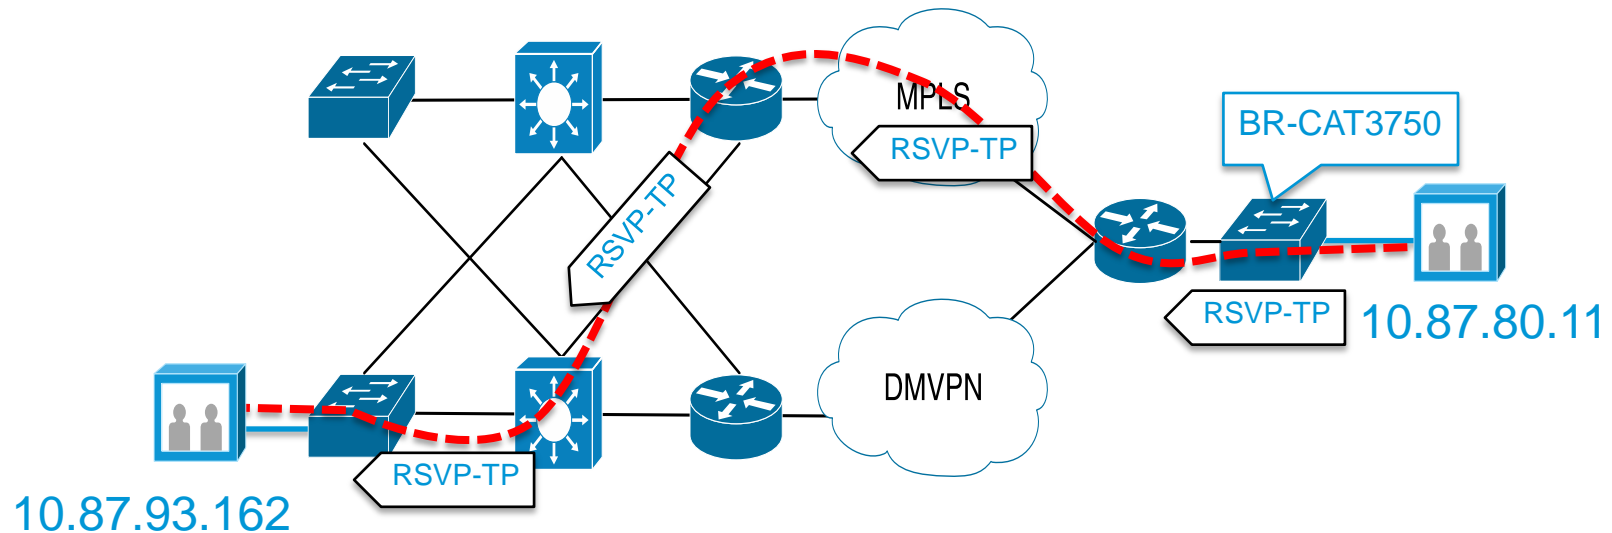

- **Exclusive RSVP Configuration NOT required (transport only)**
- RSVP messages routed on same path as media packets
- RSVP message transports collected media monitoring statistics

Mediatrace Console Output

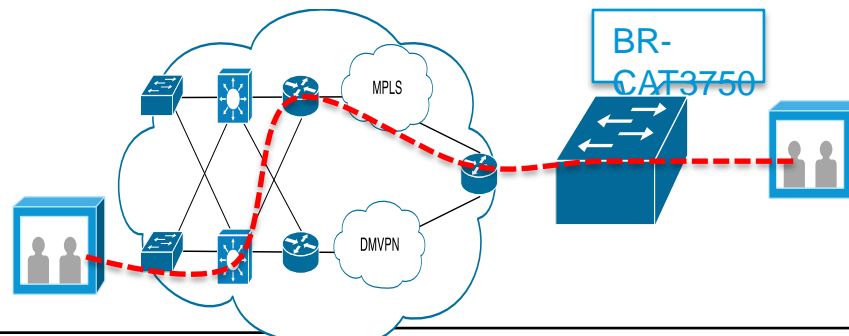

Mediatrace Hop Number: 1 (host=3925-3, ttl=254)

Metrics Collection Status: Success

Reachability Address: 10.87.93.250

Ingress Interface: Gi1/0

Egress Interface: Gi0/2

Metrics Collected:

Flow Sampling Start Timestamp: 10:17:30

Loss of measurement confidence: FALSE

Media Stop Event Occurred: FALSE

IP Packet Drop Count (pkts): 0

IP Byte Count (KB): 16261.461

IP Packet Count (pkts): 14489

IP Byte Rate (Bps): 542048

Packet Drop Reason: 64

IP DSCP: 0x20

Media Byte Rate Average (Bps): 532389

Media Byte Count (KB): 15971.681

RTP Interarrival Jitter Average (usec): 23

RTP Packets Lost (pkts): 0

RTP Packets Expected (pkts): 14507

RTP Packet Lost Event Count: 0

RTP Loss Percent (%): 0.00

Mediatrace Hop Number: 2 (host=3925-1, ttl=251)

Metrics Collection Status: Success

Reachability Address: 10.87.93.45

Ingress Interface: Gi0/0

Egress Interface: Gi1/0

Metrics Collected:

Flow Sampling Start Timestamp: 10:17:30

Loss of measurement confidence: FALSE

Media Stop Event Occurred: FALSE

IP Packet Drop Count (pkts): 0

IP Byte Count (KB): 16281.158

IP Packet Count (pkts): 14507

IP Byte Rate (Bps): 542705

Packet Drop Reason: 64

IP DSCP: 0x00

Media Byte Rate Average (Bps): 533033

Media Byte Count (KB): 15991.018

Media Packet Count (pkts): 14507

RTP Interarrival Jitter Average (usec): 23

RTP Packets Lost (pkts): 0

RTP Packets Expected (pkts): 14507

RTP Packet Lost Event Count: 0

RTP Loss Percent (%): 0.00

Mediatrace Hop Number: 3 (host=3925-1-sw, ttl=250)

Metrics Collection Status: Success

Reachability Address: 192.168.66.2

Ingress Interface: Gi0/18

Egress Interface: NOT COLLECTED

Metrics Collected:

Flow Sampling Start Timestamp: 10:17:40

Loss of measurement confidence: FALSE

Media Stop Event Occurred: FALSE

IP Packet Drop Count (pkts): 0

IP Byte Count (KB): 16259.4

IP Packet Count (pkts): 14489

IP Byte Rate (Bps): 542048

Packet Drop Reason: 64

IP DSCP: 0x20

Media Byte Rate Average (Bps): 533033

Media Byte Count (KB): 15991.018

Media Packet Count (pkts): 14507

RTP Interarrival Jitter Average (usec): 23


RTP Packets Lost (pkts): 0

RTP Packets Expected (pkts): 14507

RTP Packet Lost Event Count: 0

RTP Loss Percent (%): 0.00

Mediatrace GUI Output



Troubleshooting

Session Information

Subject **2003 CTS-3000 Site3 - ...**
Structure **Point-to-Point Session**

Session Type **Ad hoc**
Status **In Progress**


Scheduler **N/A**
Elapsed Time **00:39:13**

Start Time **2012-Mar-30 18:31:07 EDT**

View Session Topology

Troubleshooting Status

	From	To	Status	Action
<input type="radio"/>	2003 CTS-3000...	2001 CTS-3000...	No CLI access	
<input checked="" type="radio"/>	2001 CTS-3000...	2003 CTS-3000...	In Progress	Stop

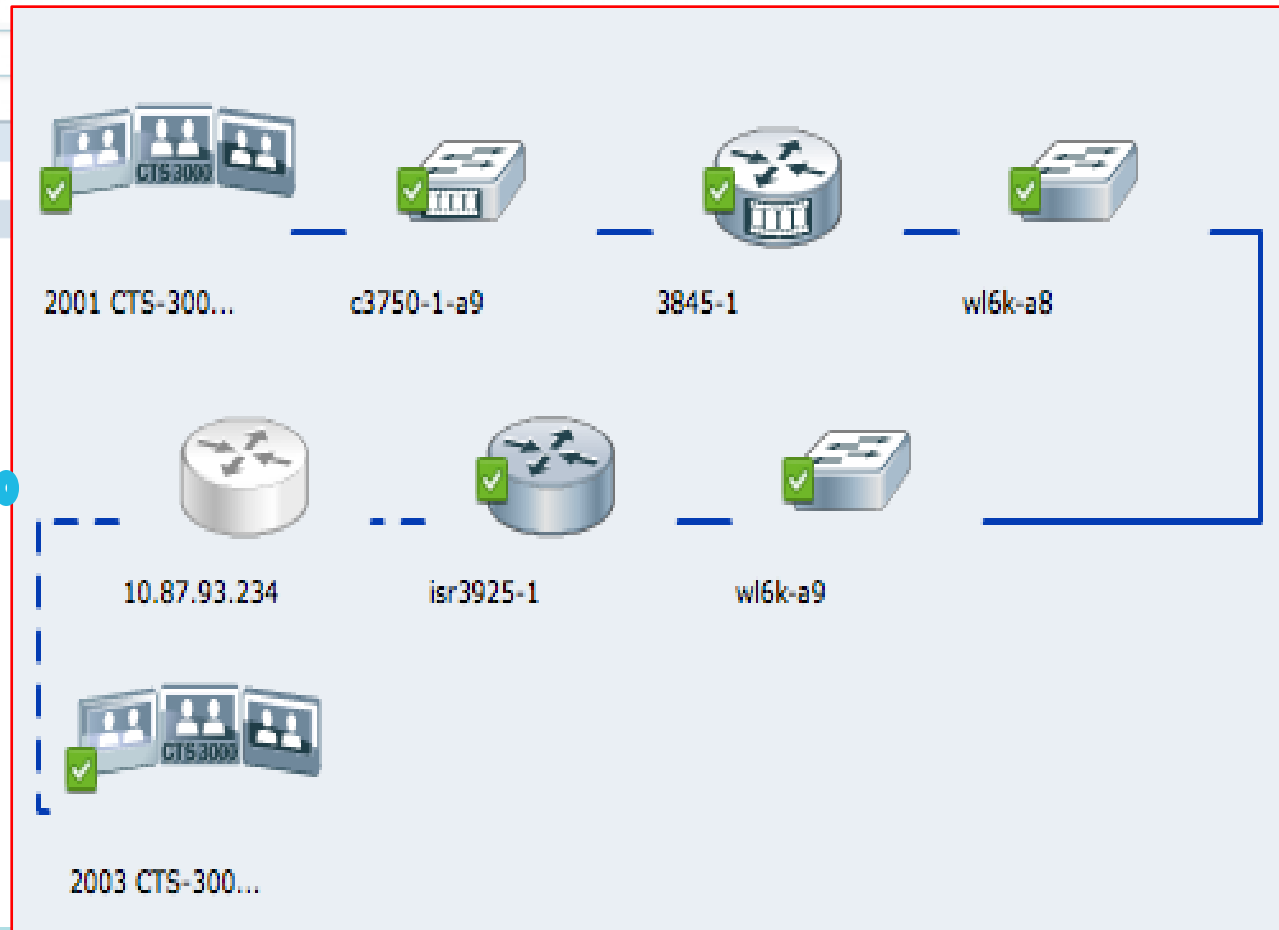

Mediatrace Results on CPCM

CPCM invoked trace on initiator thru WSMA (web services management agent)

Polling Question 2

Does your organization have a global Quality of Service Policy?


- a) Yes
- b) No
- c) Work in progress
- d) I don't know

Agenda

- Cisco Medianet Overview
- Understanding Medianet Media Awareness
 - **NBAR**
 - Metadata Flow
- Media Awareness Integration

HTTP/HTTPS Ports: Open 24x7


Problem: Static port classification is No Longer Sufficient

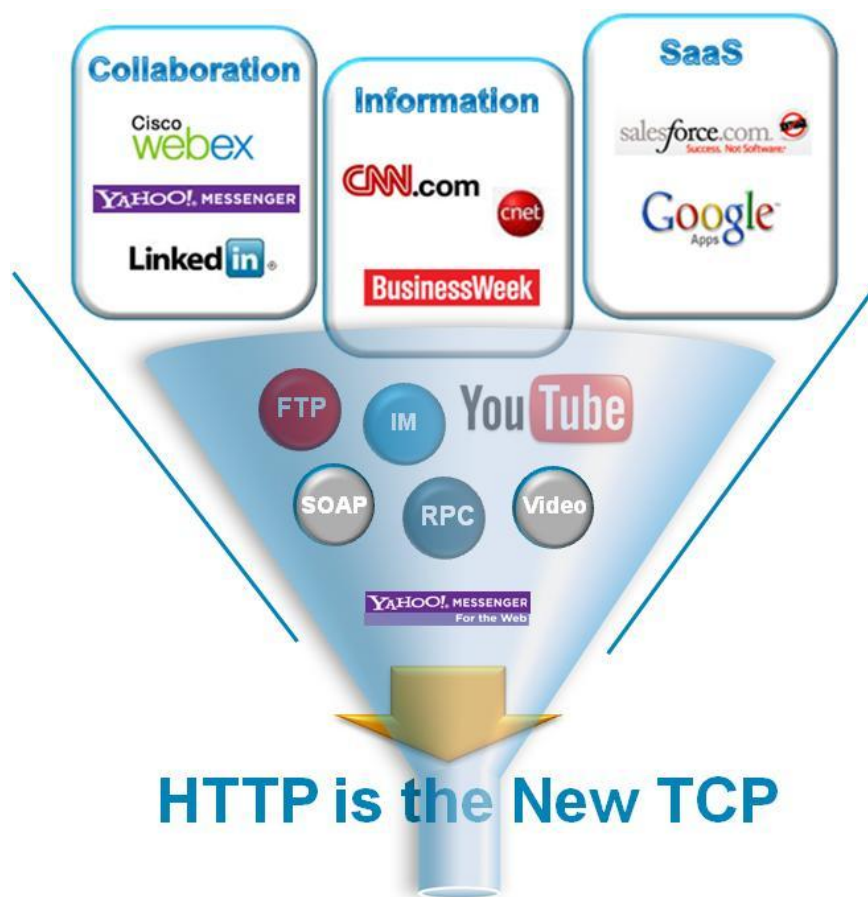

- 5 Tuple is a thing of the past, ACL Traffic Class doesn't scale administratively
- Increasing use of Encryption (e.g HTTPS, TLS)
- User Experience sessions are composites of multiple application flows (e.g Webex Video, Voice, Data)
- IPv4 and IPv6 transition techniques proliferation


Performance Monitor Capabilities

Precise Traffic Flow Discovery and Analysis

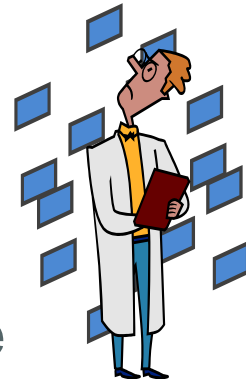

- Network device discovers traffic flow for performance analysis
- System operator defines metrics to gauge performance
- Per-Device Hop metric collection for RTP and TCP traffic;
 - RTP performance metrics; (Pkt-Rate, Jitter, Loss)
 - TCP performance metrics; (Media Pkt-Rate, Round-Trip-Time)
- Proactive monitoring for voice and video quality of service

Performance Monitor Limited Visibility

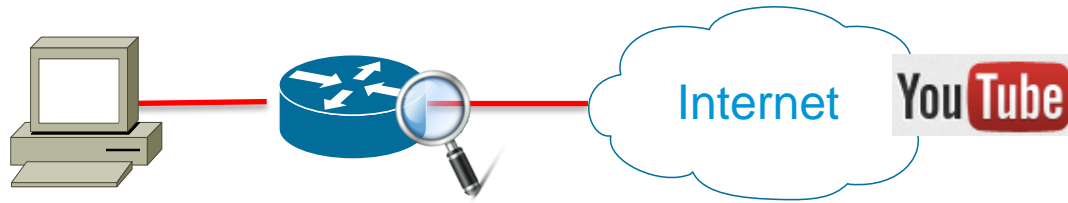

HQR1#show performance monitor status

```
Match: ipv4 source address = 10.87.80.138, ipv4 destination address = 74.125.228.39, transport
source-port = 49937, transport destination-port = 80, ip protocol = 6,
Policy: tcp-metric, Class: tcp
```


```
routing forwarding-status           : Unknow
transport round-trip-time           (msec) : NA
transport round-trip-time sum       (msec) : NA
transport round-trip-time samples   : NA
transport event packet-loss counter : 1
interface input                     : Null
interface output                    : Null
counter bytes                       : 240
counter packets                     : 3
counter bytes rate                   : 4
application media bytes counter     : 120
application media packets counter long : 3
application media packets rate      : 0
application media event              : Stop
monitor event                       : false
transport round-trip-time min       (msec) : NA
transport round-trip-time max       (msec) : NA
ip dscp                             : 0x00
ip ttl                              : 0
```

HQR1

```
!
ip access-list extended http
permit tcp any any eq www
!
class-map match-all http
  match access-group name http
!
policy-map type performance-monitor tcp-metric
  class tcp
    flow monitor inline
    record default-tcp


interface GigabitEthernet0/2
  service-policy type performance-monitor input tcp-metric
  service-policy type performance-monitor output tcp-metric
```

Performance Monitor on GUI

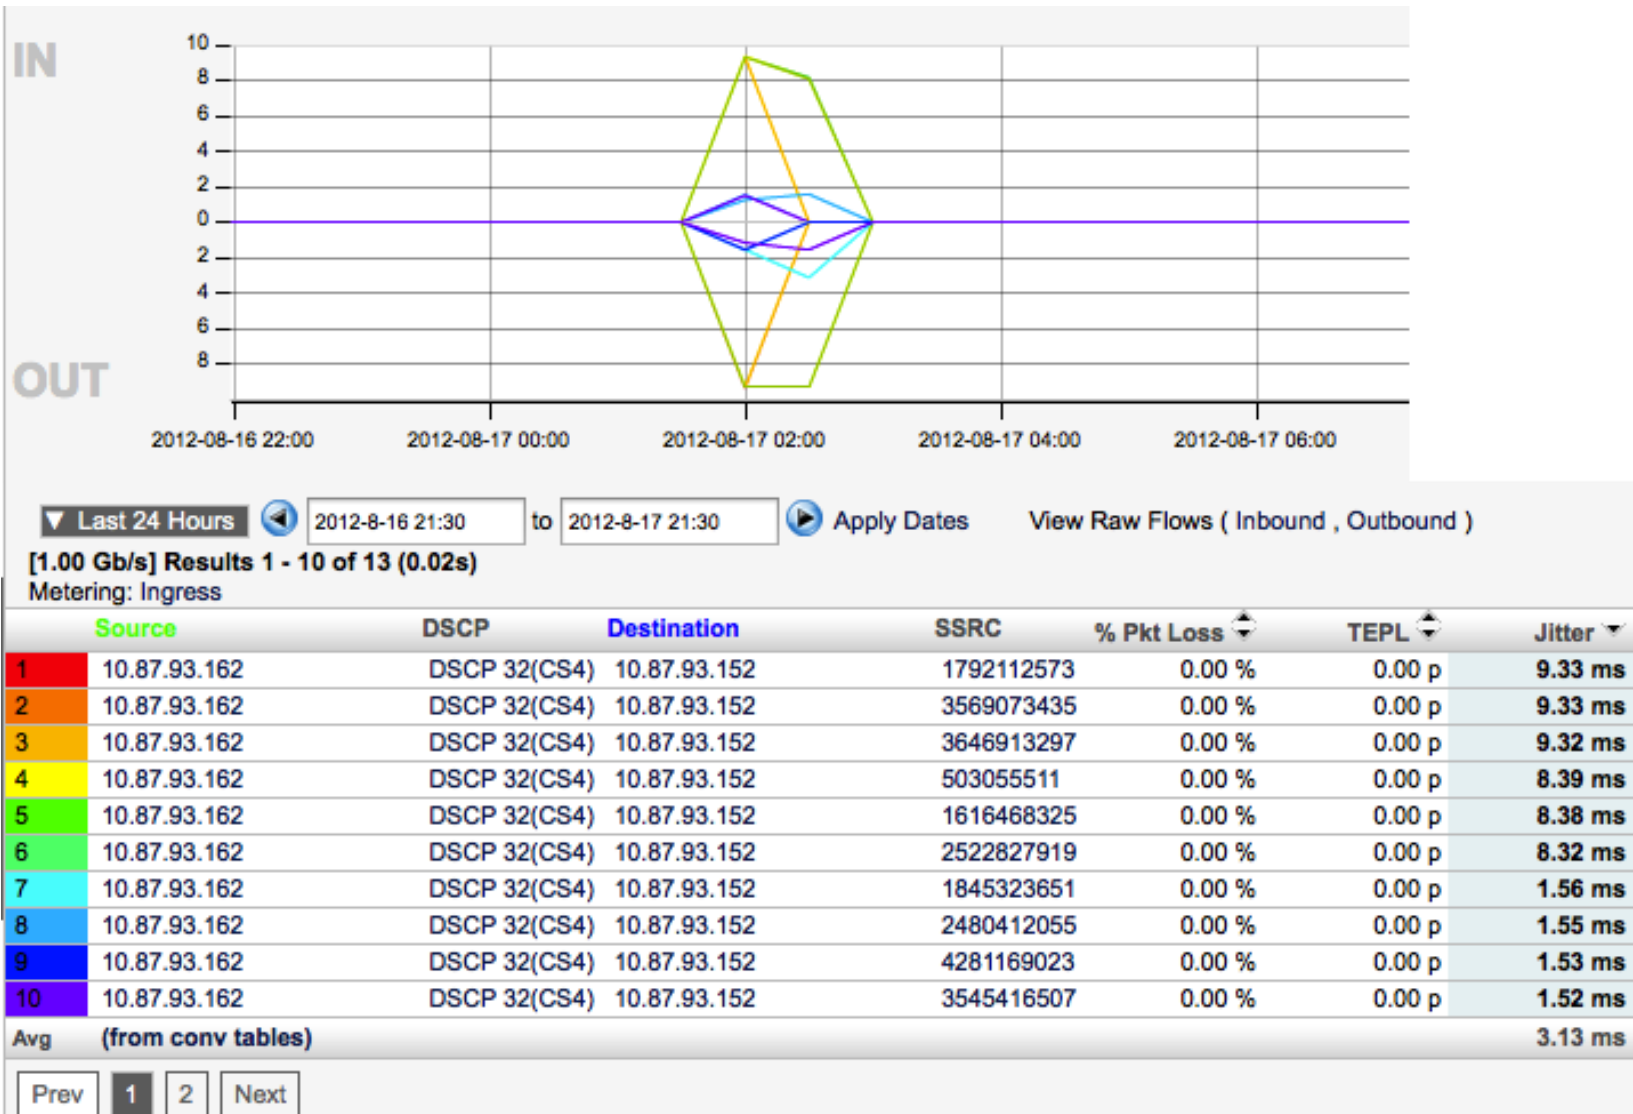


NBAR: Full-Packet Inspection

Stateful and Dynamic Inspection

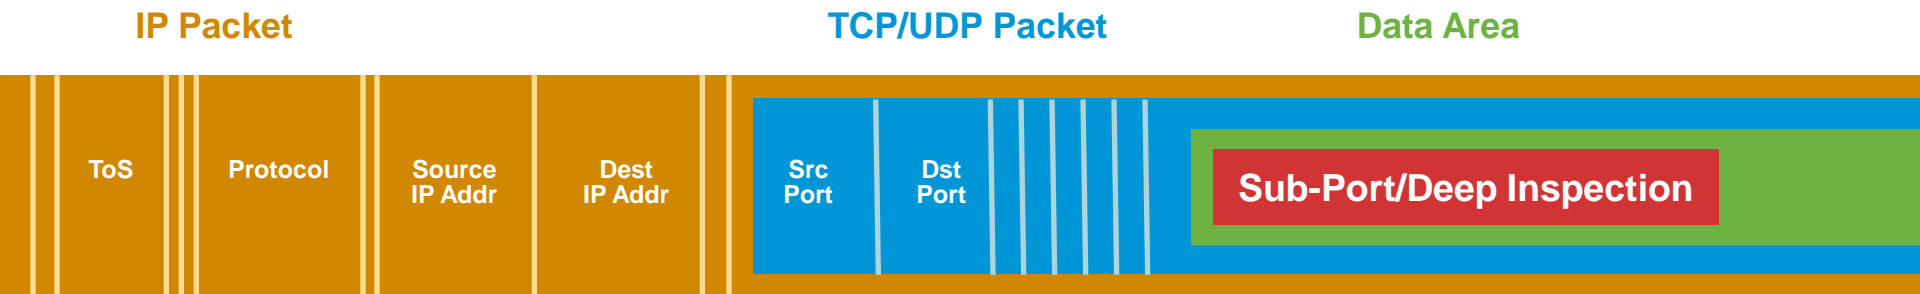

- Used for intelligent policy (QoS, filtering, etc.) or reporting
- Identifies over 1000 applications and protocols TCP and UDP port numbers
 - Statically assigned
 - Dynamically assigned during connection establishment
 - RTP and RTP payload type identification
 - Cisco TelePresence media and signaling supported in IOS 15.1(3)T
 - WebEx desktop-share/audio/video supported in 15.2(2)T
- Non-TCP and non-UDP IP protocols
- Data packet inspection for matching values


Matching on Application Attributes

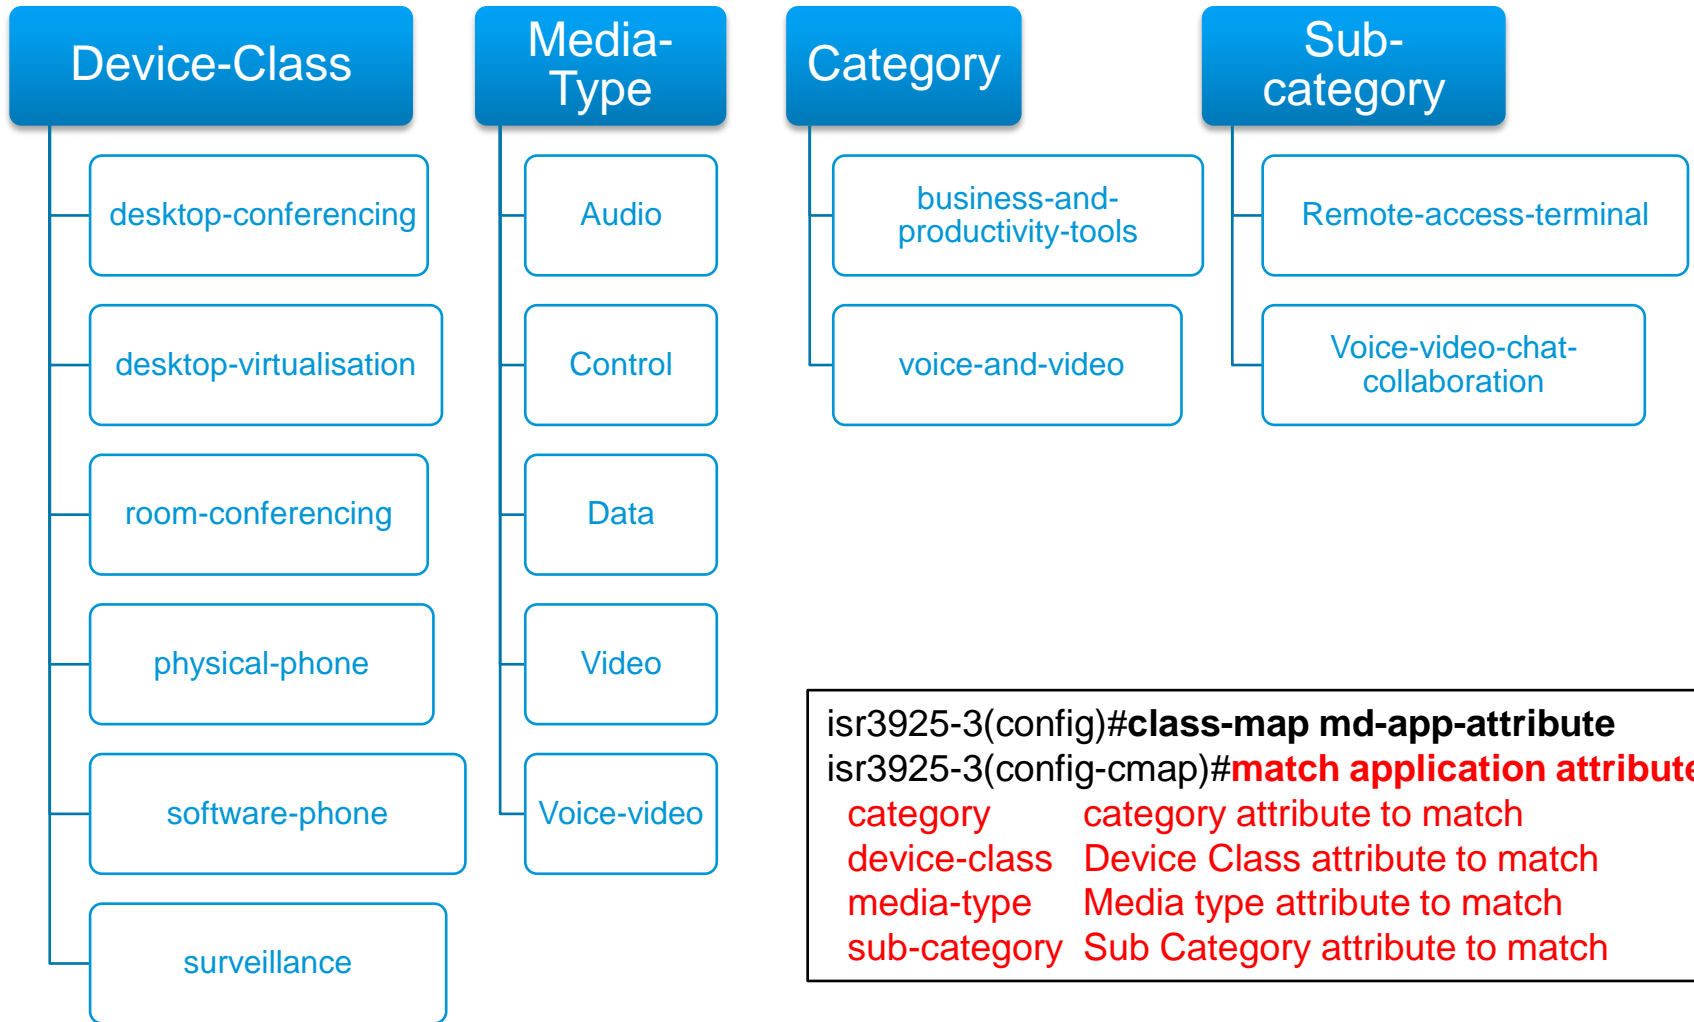

```
isr3925-3(config)#class-map md-app-attribute
isr3925-3(config-cmap)#match application attribute ?
category      category attribute to match
device-class  Device Class attribute to match
media-type    Media type attribute to match
sub-category  Sub Category attribute to match
```


Example: Enable performance-monitoring for all “telepresence” flows

Example: Define configuration with descriptions

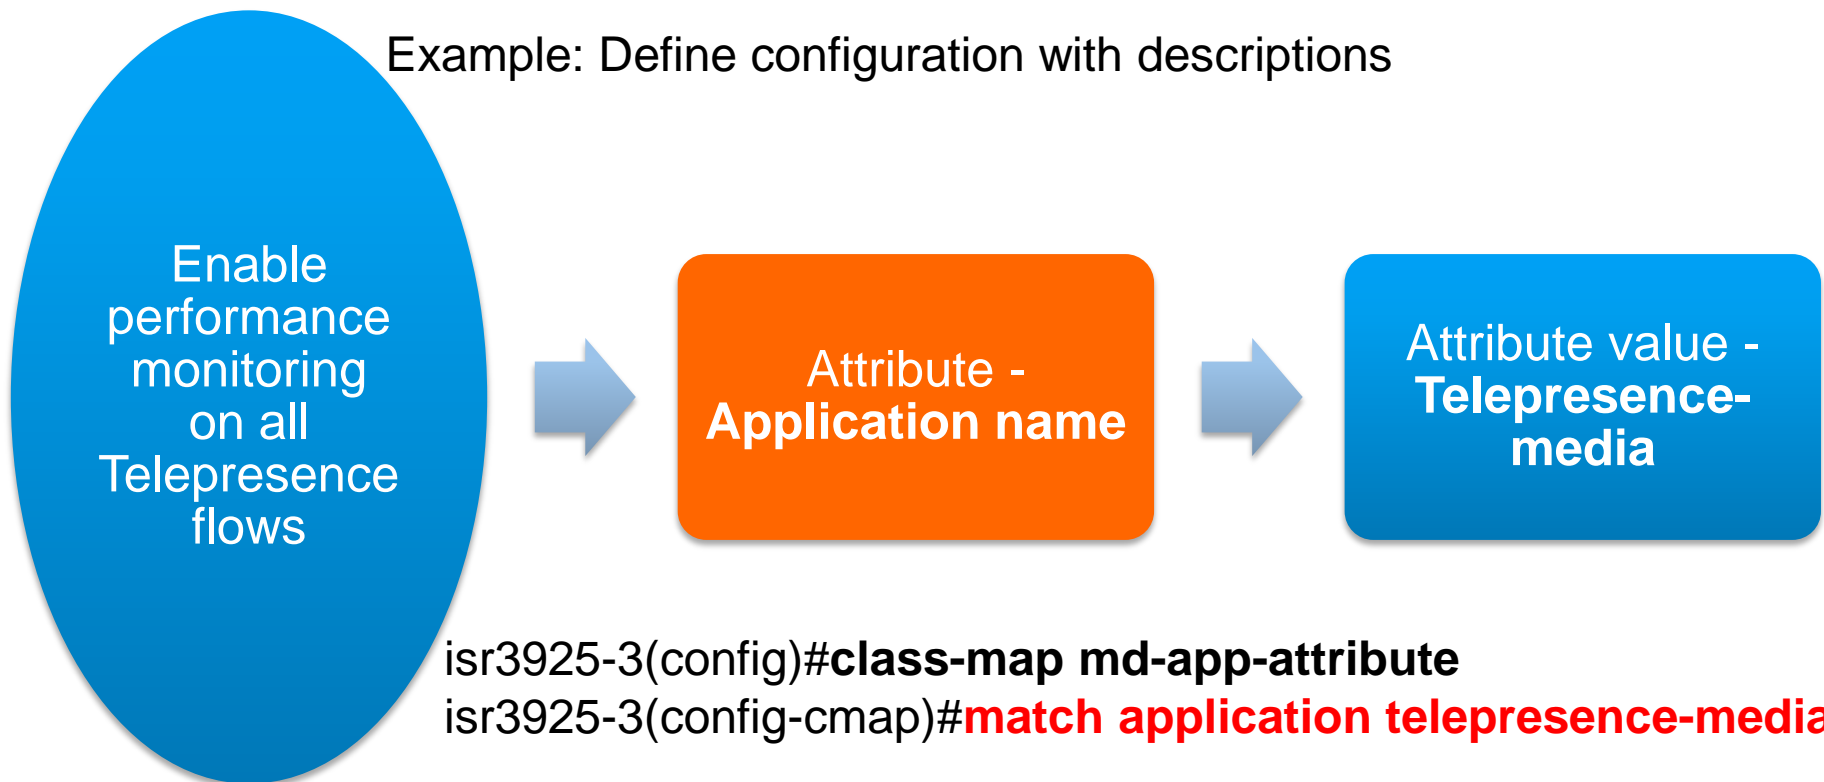

```
isr3925-3(config)#class-map md-app-attribute  
isr3925-3(config-cmap)#match application telepresence-media
```

NBAR and Flexible NetFlow Integration

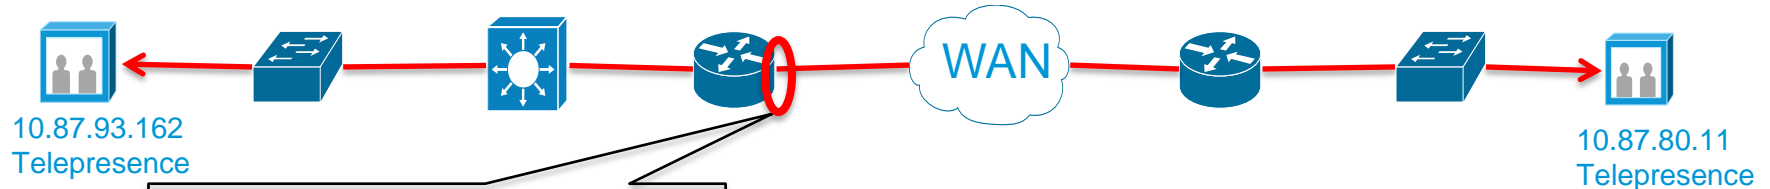

```

interface gigabitethernet 0/0
  ip nbar protocol-discovery
  ip flow monitor find-app input
  ip flow monitor find-app output
  !
  flow monitor find-app
  exporter netflow-collector
  record application
  !
  flow record application
  match ipv4 dscp
  match ipv4 protocol
  match ipv4 source address
  match ipv4 destination address
  match transport source-port
  match transport destination-port
  collect application name
  
```

NBAR Protocol Discovery

NBAR extracts fields from flows and exposes it into Flexible NetFlow

Netflow Record Collection

Configures NetFlow to collect 5-Tuple information including DSCP value and NBAR Application Name

NBAR and Flexible NetFlow CLI Output

Five-Tuple + DSCP + NBAR AppID = Flexible NetFlow with NBAR

```
isr3925-1#show flow monitor nbar-flow cache
```

```
Cache type: Normal
Cache size: 4096
Current entries: 25
High Watermark: 294

Flows added: 12256
Flows aged: 12231
- Active timeout ( 1800 secs) 89
- Inactive timeout ( 15 secs) 12142
- Event aged 0
- Watermark aged 0
- Emergency aged 0
```

Show command to show IP Flow's 5-Tuple details and the associated DSCP and Application Name


IPV4 SRC ADDR	IPV4 DST ADDR	TRNS SRC PORT	TRNS DST PORT	IP DSCP	IP PROT	APP NAME
10.87.93.162	10.87.80.11	21106	25040	0x20	17	cisco telepresence-media
10.87.93.162	10.87.80.11	21107	25041	0x20	17	cisco telepresence-control
10.87.93.162	10.87.80.11	27346	21296	0x20	17	cisco telepresence-media
10.87.93.162	10.87.80.11	27347	21297	0x20	17	cisco telepresence-control
10.87.91.134	10.87.80.12	5060	37337	0x00	6	port sip
10.81.254.131	10.87.93.45	123	123	0x00	17	cisco skype

Agenda

- Cisco Medianet Overview
- Understanding Medianet Media Awareness
 - NBAR
 - **Metadata Flow**
- Media Awareness Integration

Metadata Attributes of a Flow

Attribute Announcements to the Network, Not the Payload.

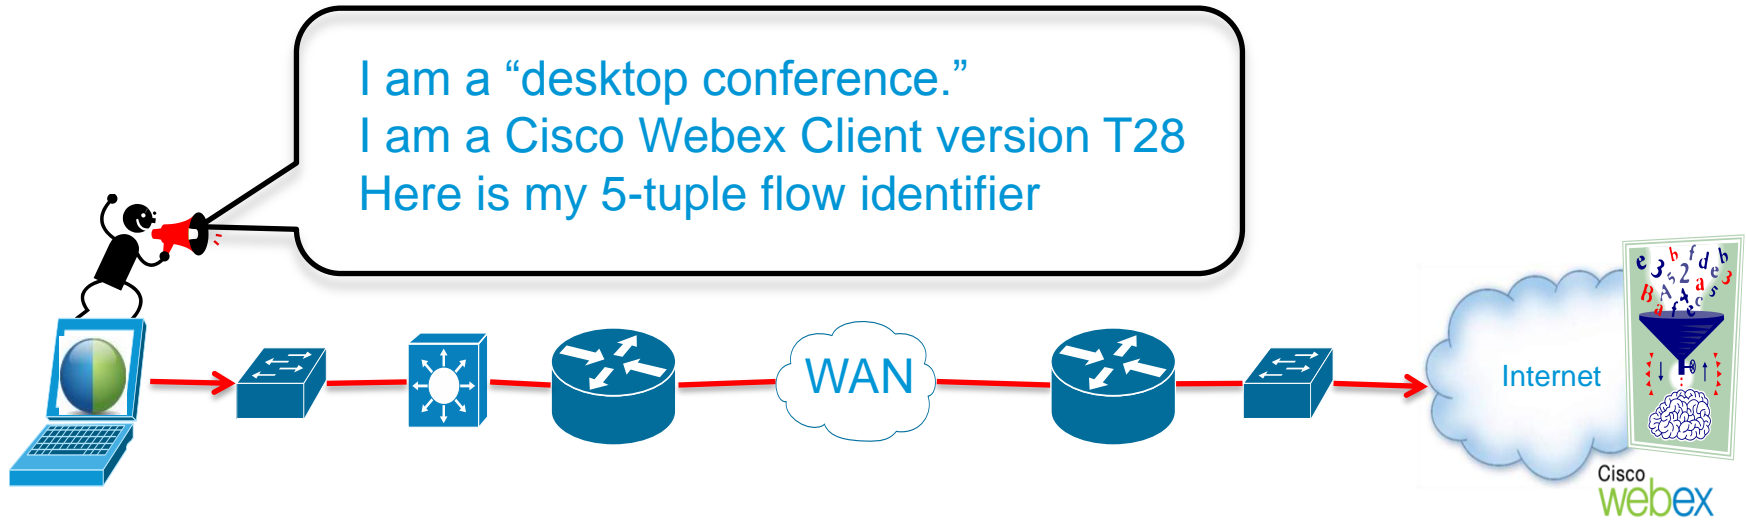

Flow Identifier

Metadata

IP Src	IP Dst	Prot	L4 Src	L4 Dst	App Name	App Vendor	App Ver	Endpoint Model	Device Class
10.87.80.130	64.68.106.197	TCP	50402	443	Webex-meeting	Cisco	T28	Webex-client -data	Desktop Conferencing

Flow Metadata Components

■ Metadata Producers

- Media Service Interface Endpoints
- NBAR
- Media Service Proxy Network Devices

■ Flow Metadata Consumers

- Cisco Policy Language (QoS/C3PL)
- Flexible NetFlow
- Performance Monitor


■ Metadata Flow Database

■ Metadata Flow Signaling Messages

- RSVP Propagates Flow Identifier and Metadata Attributes along IP path.

Medianet Software Reference


Required Software and License Feature for Medianet Media Awareness

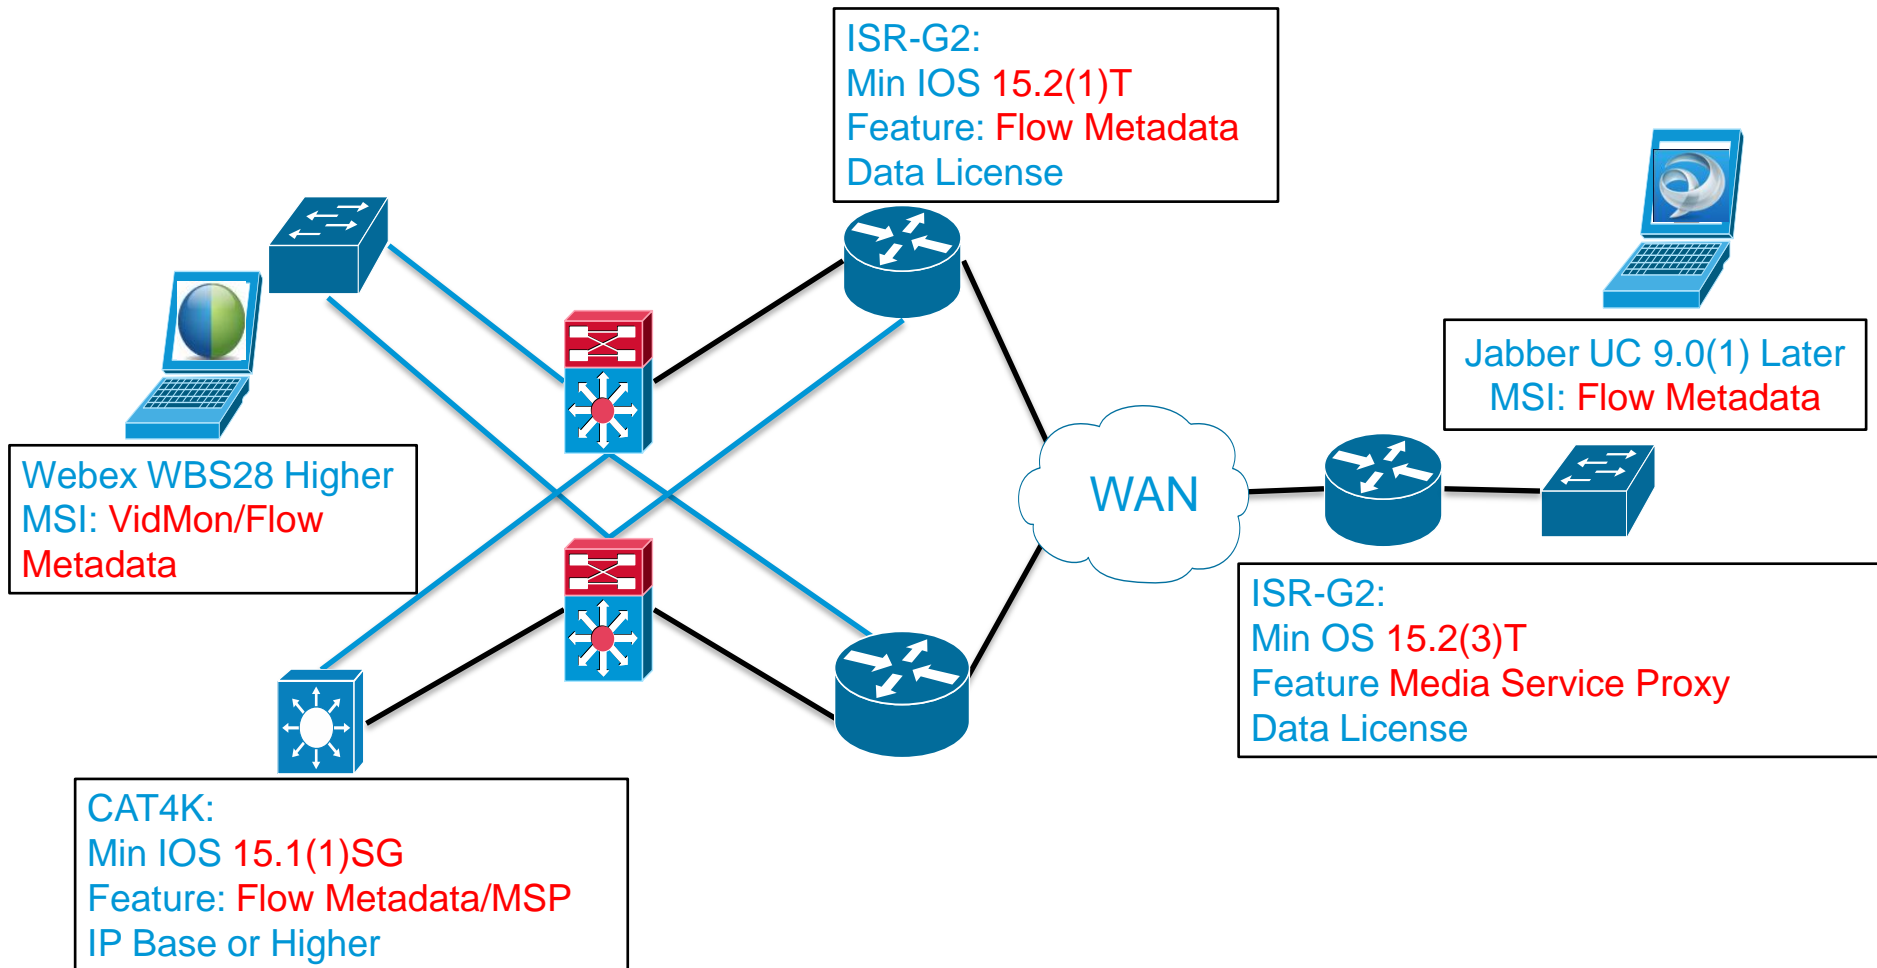

Reference: http://www.cisco.com/en/US/prod/collateral/routers/ps10536/data_sheet_c78-612429.html

Flow Metadata Producer


Cisco WebEx FR26: MSI.exe Flow Metadata Originator

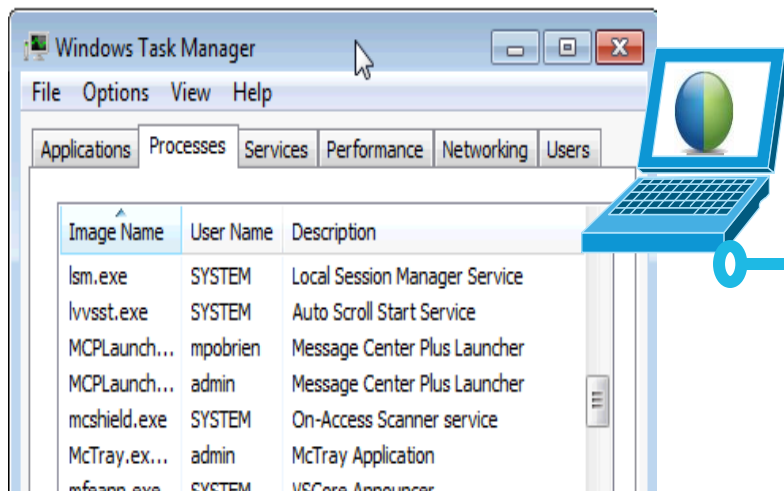

MSI Embedded with Webex WBS28 Installation

wmsi.dll is responsible for originating RSVP message for propagating Metadata traffic.

msid.exe *32 SYSTEM Cisco Media Services Interface

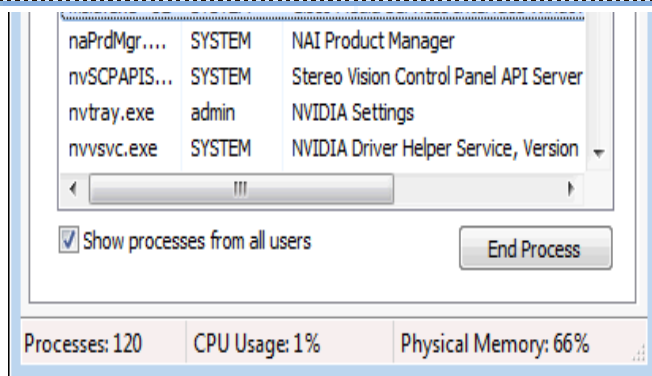

Media Services Interface Resides in WebEx Client App

- API – Windows, Linux
- Middleware – CDP, LLDP, RSVP, DHCP, Perf-Mon, Mediatrace
- Host Stack/Service Protocols

MSI on PCs

- Middleware – CDP, LLDP, RSVP, DHCP, Perf-Mon, Mediatrace
- PC based Applications (WebEx, Jabber for Windows)
 - Separate download on CCO (yes, it's really 'MSI.msi!')
 - Needs Administrator Rights
 - Runs as Windows Service
 - Shared by all MSI-aware applications
 - MSI services enabled (eg. CDP)

```
3945-BB0206-sw#show cdp neighbors fast0/6 detail


-----

Device ID: MEDIANET-SITE

Entry address(es):
  IPv6 address: FE80::E499:2FBE:56A3:663A(link-local)
  IP address: 10.4.9.12
Platform: MSI on Windows,
Capabilities: Host
Interface: FastEthernet0/6,
Port ID (outgoing port): Local Area Connection
Holdtime : 165 sec
Version :
Microsoft Windows Vista Business Edition (build 6000)
64 bit


advertisement version: 2

Management address(es):
```

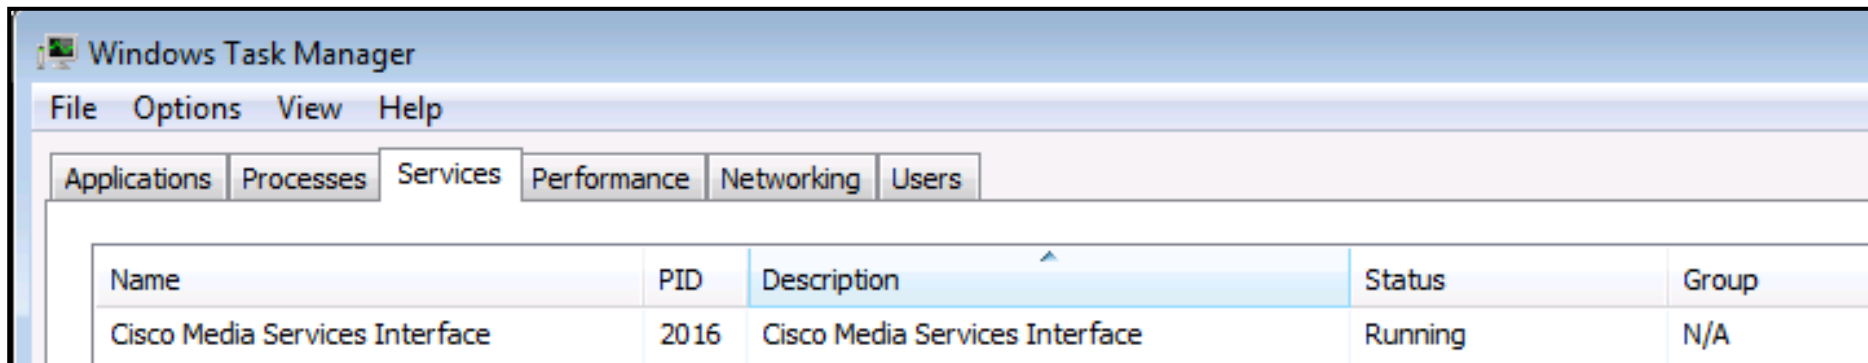

Media Service Proxy as Metadata Producer

Identification

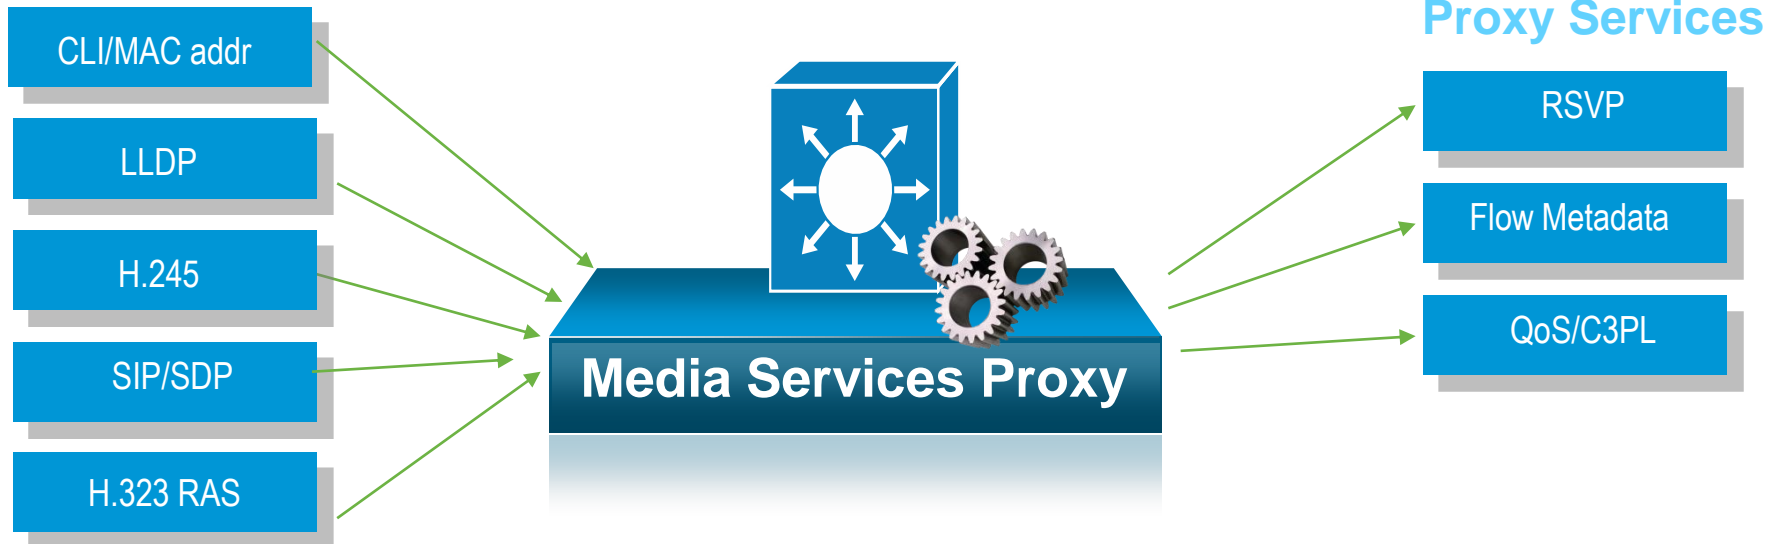

- **Provides Medianet Services on behalf of Non-MSI enabled devices**
- **Deployed at the Access Layer of the Network**

http://www.cisco.com/en/US/prod/collateral/routers/ps10536/data_sheet_c78-612429.html

CAT4K:
Min IOS 15.1(1)SG
Feature: Flow Metadata/MSP
IP Base or Higher

Metadata Flow Database

Flow Metadata Table Showing Learned WebEx Flow Attributes

```
isr3925-1#show metadata flow local-flow-id 216
```

To	From	Protocol	SPort	DPort	Ingress I/F	Egress I/F
64.68.106.197	10.87.80.130	TCP	50401	443	GigabitEthernet0/2	GigabitEthernet0/0

Metadata Attributes :

```
Application Tag          : 414 ()  
Application Group       : webex-group  
Application Vendor      : Cisco Systems, Inc.  
Application Category    : voice-and-video  
Application Sub Category : control-and-signaling  
Application Device Class : desktop-conferencing  
Application Media Type   : data
```

```
Unknown Identifier (147) : [ 00 00 00 06 ]
```

```
Unknown Identifier (148) : [ 00 00 00 06 ]
```

```
Unknown Identifier (150) : [ 00 00 00 02 ]
```

```
Application Name        : webex-meeting  
Application Version     : T28  
End Point Model         : webex-meeting client - data
```

5 Tuple Flow Identifier

TCP 443 indicates **SSL/TLS Encryption**

Metadata Attribute

The router learns attributes from RSVP message sent from by MSI enabled WebEx

Metadata Attribute

Metadata Signaling RSVP Transport



```

+ RSVP Header. PATH Message.
+ SESSION: IPv4, Destination 128.107.241.169, Protocol 6, Port 80.
+ HOP: IPv4, 10.87.80.138
+ TIME VALUES: 30000 ms
- SENDER TEMPLATE: IPv4, Sender 10.87.80.138, Port 57489.
  Length: 12
  Object class: SENDER TEMPLATE object (11)
  C-type: 1 - IPv4
  Sender IPv4 address: 10.87.80.138 (10.87.80.138)
  Sender port number: 57489
+ SENDER TSPEC: IntServ, Token Bucket, 0 bytes/sec.
+ ADSPEC
- Unknown object
  Length: 236
  Object class: Unknown (234)
  Data (232 bytes)
  
```

```

.....W
ebex-mee ting.T28
.webex-m eeting c
lient - data..
  
```


Metadata AppID

```

L90 65 62 65 78 2d 6d 65 65 74 69 6e 67 03 54 32 38
101a0 1b 77 65 62 65 78 2d 6d 65 65 74 69 6e 67 20 62
101b0 6c 69 65 6e 74 20 2d 20 64 61 74 61 00 00
  
```

Application Identifier use
for traffic class
identification


Configuring Flow Metadata Awareness

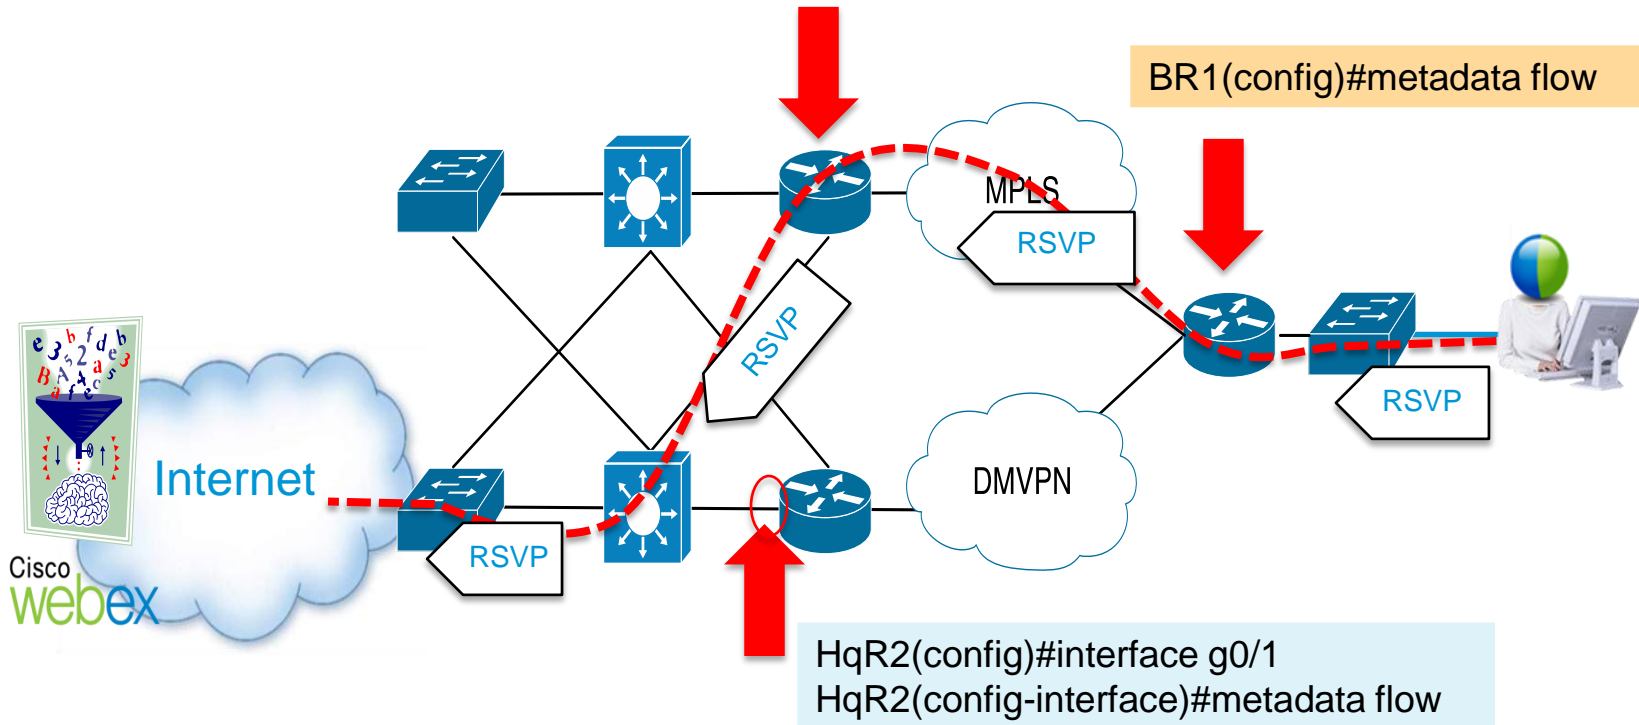

- Minimum Software Release Cisco IOS 15.2(1)T or Higher
- Enable metadata flow globally, or per interface

Flow Metadata Deployment Consideration

Firewall ACL Rules for Flow Metadata

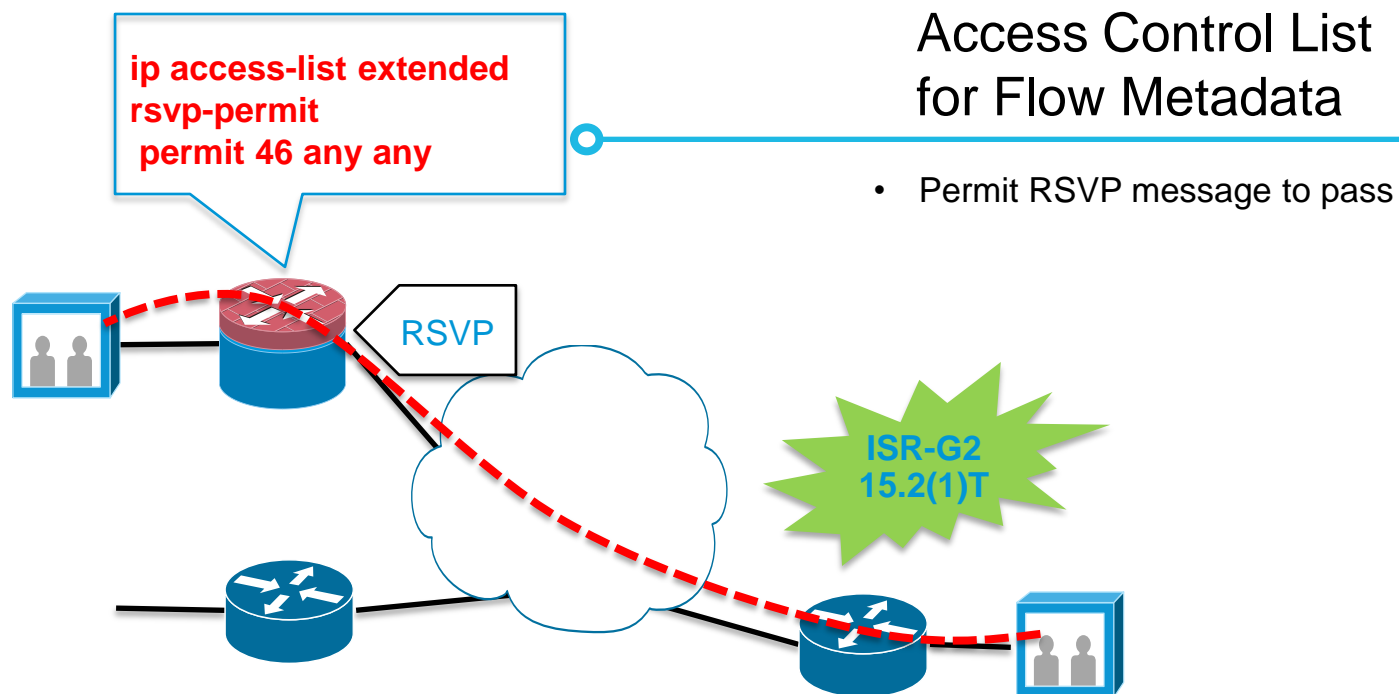

- RSVP Protocol 46 must be allowed
- RSVP Propagates Metadata For Network Device Consumption

Agenda


- Cisco Medianet Overview
- Understanding Medianet Media Awareness
- **Media Awareness Integration**

Media Awareness Integration

Simplifying QoS Deployment Strategies with Metadata

- **Integrating NBAR with Flow Metadata**
Propagating attributes learned thru NBAR
- Extending QoS Trust Boundary for Priority Applications
- Attribute Base Performance Monitoring

Flow Metadata Integration with NBAR

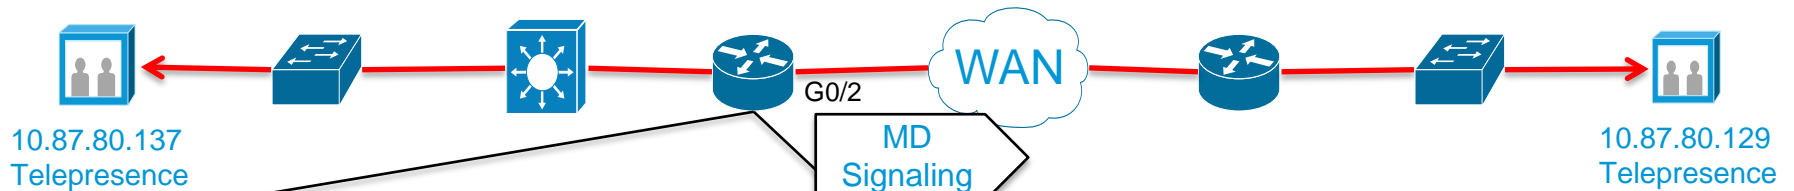

```
ISR3925-1#show run
```

```
!  
metadata flow  
metadata flow transmit  
!  
class-map match-all Telepresence  
match application telepresence-media  
!  
policy-map nbar-md  
class Telepresence  
set dscp cs4  
!  
int g0/2  
ip nbar protocol-discovery  
service-policy in nbar-md
```

Enables metadata signalling message to propagate

Configures matching traffic class to trigger metadata signal

Applies a policy against the NBAR traffic class

NBAR enabled to discover protocol flows

Flow Metadata Integration with NBAR



```
isr3925-3#show metadata flow local-flow-id 6
```

To	From	Protocol	SPort	DPort	Ingress I/F	Egress I/F
10.87.93.162	10.87.80.11	UDP	25140	27812	GigabitEthernet0/2	GigabitEthernet0/1

Metadata Attributes :

Application Tag : 218103921 (telepresence-media)
Application Name : **telepresence-media**

Matched filters:

Direction: IN:

Direction: OUT:


PM :

QOS : "application telepresence-media" ○

Metadata consumed by QoS CPL

Resetting WAN Tampered QoS Values

Normalize Tampered QoS Values from WAN with Cisco Policy

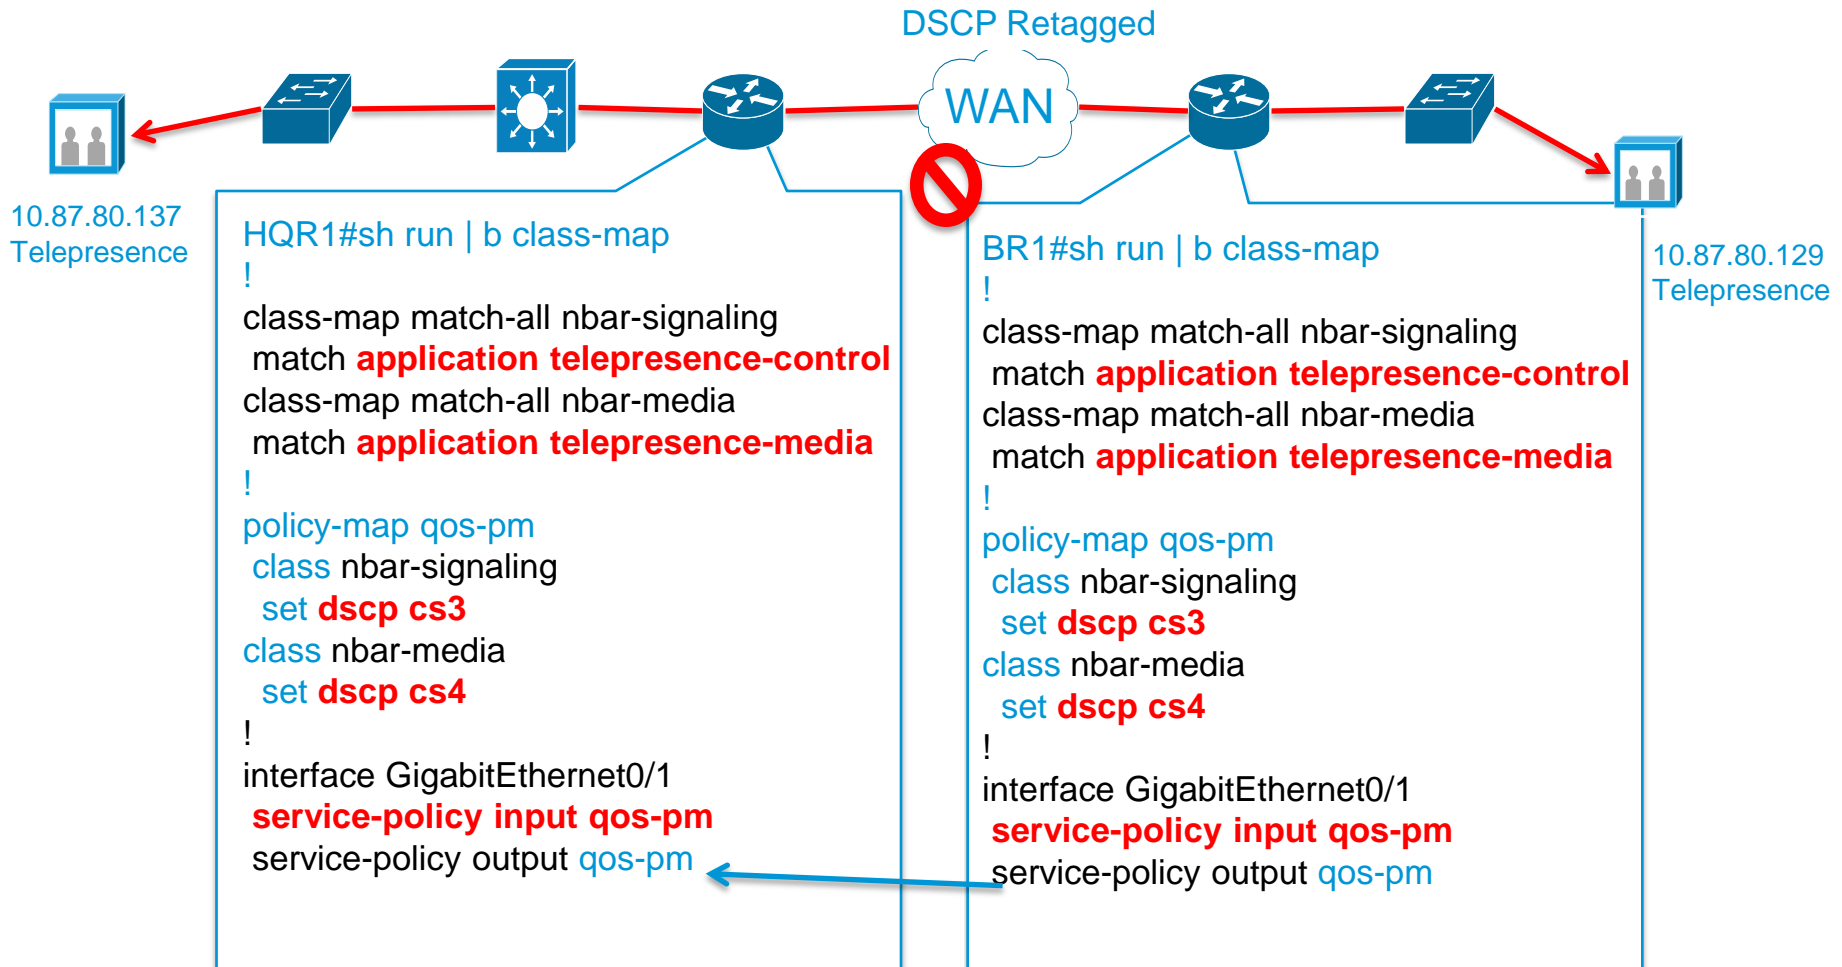

Reset WAN Tampered QoS Values

DSCP Retagged



```
HQR1#show policy-map interface class nbar-media
GigabitEthernet0/0
```

Service-policy input: **nbar-pm**

Class-map: nbar-media (match-any)
 96758 packets, 79759707 bytes
 5 minute offered rate 1589000 bps, drop rate
 0000 bps

Match: protocol telepresence-media

96758 packets, 79759707 bytes
 5 minute rate 1589000 bps
 QoS Set
dscp cs4
Packets marked 100939

```
BR1#show policy-map interface class nbar-media
GigabitEthernet0/0
```

Service-policy output: **nbar-pm**

Class-map: nbar-media (match-any)
 103960 packets, 87490032 bytes
 5 minute offered rate 1741000 bps, drop rate 0000
 bps

Match: protocol telepresence-media

103960 packets, 87490032 bytes
 5 minute rate 1741000 bps
 QoS Set
dscp cs4
Packets marked 108408


Media Awareness Integration

Simplifying QoS Deployment Strategies with Metadata

- Flow Granularity with NBAR2
- **Extending QoS Trust Boundary for Priority Applications**
 - Collaborative Soft-clients on PCs in the Data VLAN can be serviced with QoS
- Attribute Base Performance Monitoring

Restricting Data VLAN for QoS


Unintended Consequences by Design

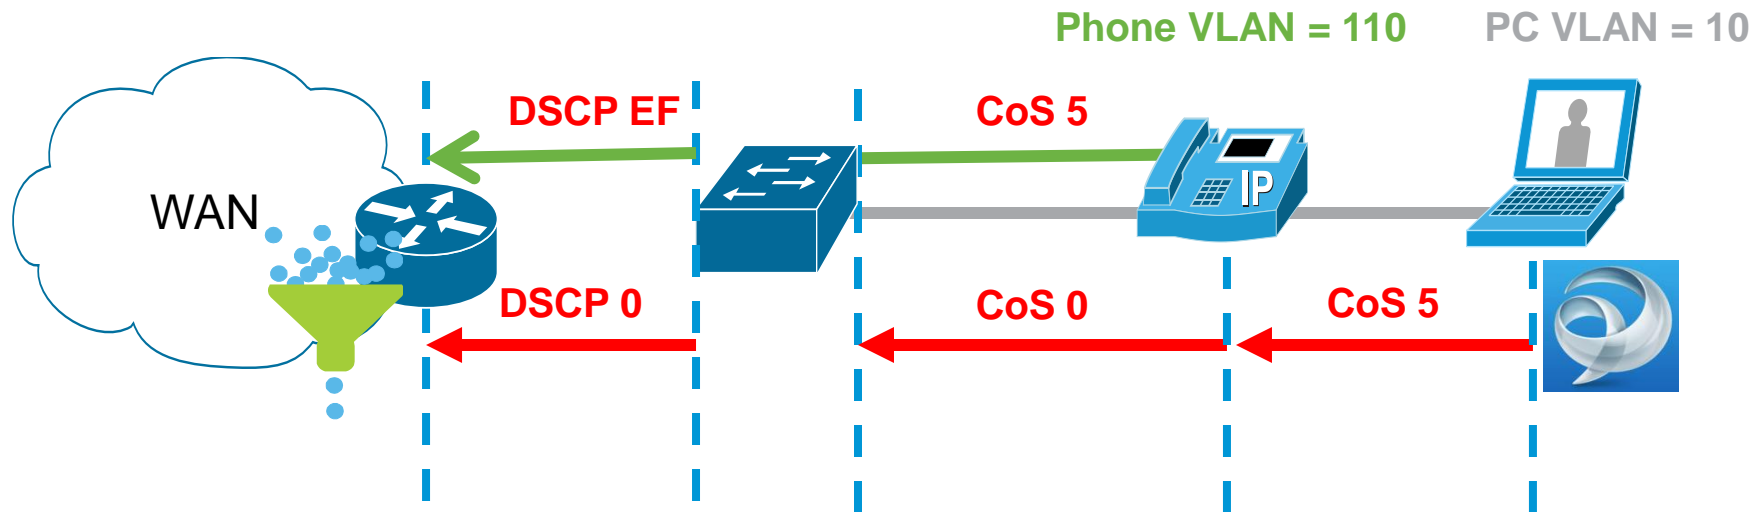

- Quality—Separation of broadcast domains i.e. phones and PCs are on separate subnets
- Security—Different network policies for different subnets; WORM attacks can be contained to the PC VLANs
- Media Applications on hosts are restricted to data vlan QoS Policies


Extending QoS Trust Boundary

Trust Boundary Operation and Extension

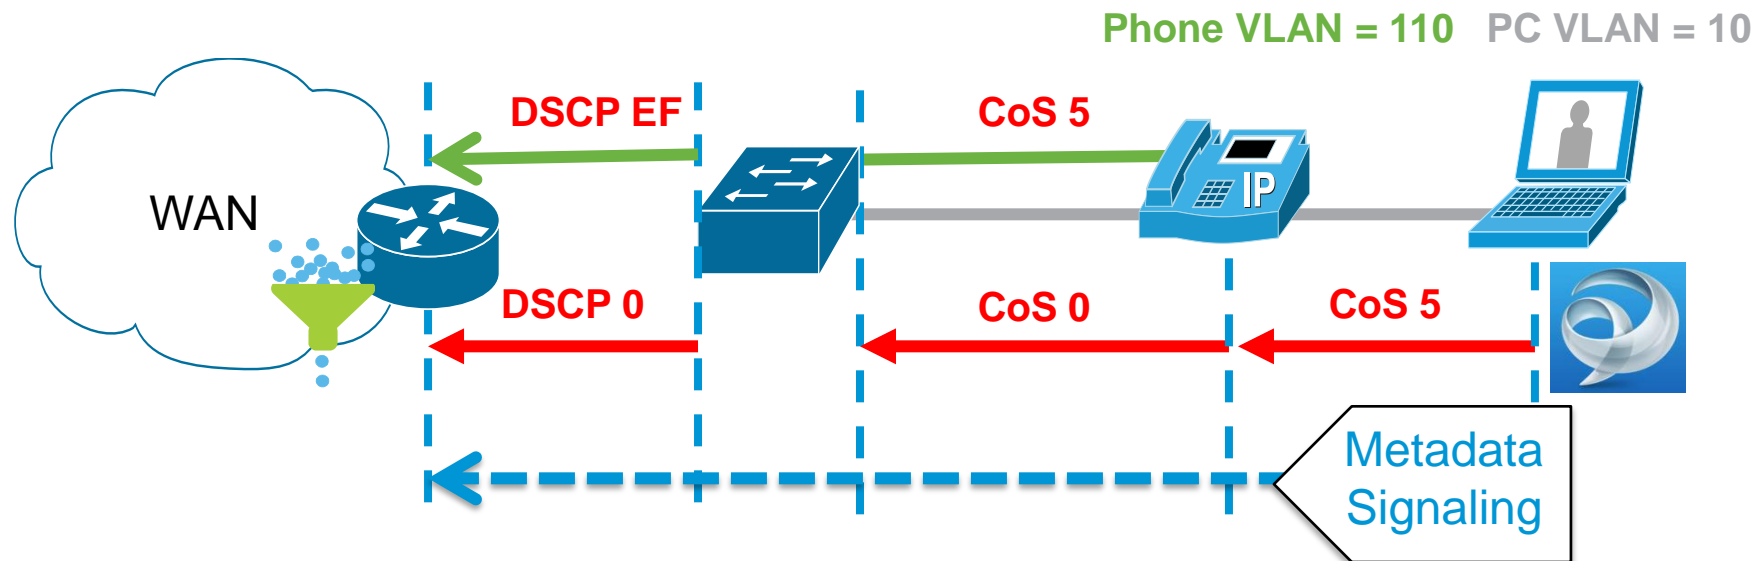

- MSI enabled Endpoint describes application attributes to the network
- Metadata signaling propagates attributes to downstream Media Aware devices
- Devices along path Match and Apply QoS policies based on metadata attributes

Extending QoS Trust Boundary

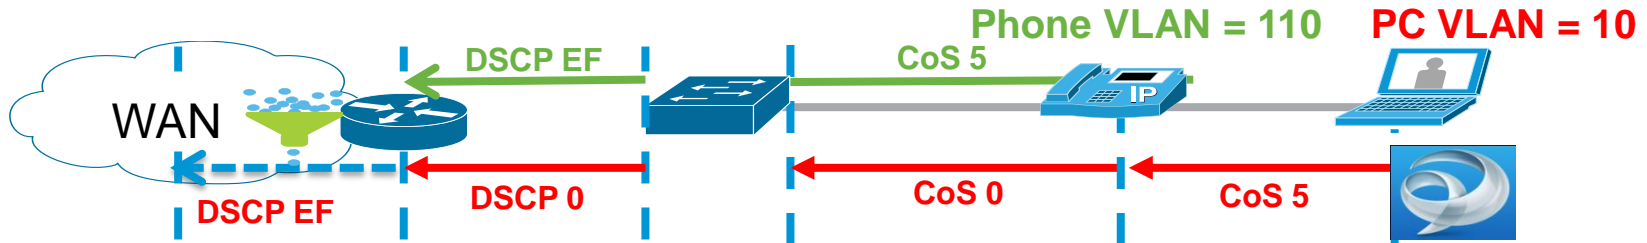

```
Isr3925-1#show metadata flow local-flow-id 5
```

To	From	Protocol	SPort	DPort	Ingress I/F	Egress I/F
64.102.38.183	10.1.1.2	UDP				
24594	16384	GigabitEthernet0/1			GigabitEthernet0/2	

Metadata Attributes :

```
Application Name       : cisco-phone
Application Tag        : 218103889 (cisco-phone)
Application Category   : voice-video
Application Sub Category : voice-video-chat-collaboration
Application Device Class : software-phone
Application Media Type  : audio
End Point Model        : Jabber for Windows
Unknown Identifier (147) : [ 00 00 00 05 ]
Unknown Identifier (148) : [ 00 00 00 02 ]
Application Vendor     : Cisco Systems, Inc.
Application Version    : Jabber 9.0.0
```

Matched filters :

Direction: IN:

Direction: OUT:

QoS : "cisco-phone"

```
Isr3925-1#show run | b class-map
class-map match-all jabber
match application cisco-phone
```

```
!
policy-map qos-md
class jabber
set dscp ef
!
```

```
Interface GigabitEthernet 0/2
service-policy out qos-md
```

Media Awareness Integration with QoS

Simple and Flexible QoS Deployment with Metadata

- Flow Granularity with NBAR2
Leverage Specific flow identification within an application stream
- Extending QoS Trust Boundary for Priority Applications
IP Communicator on Laptops in the Data VLAN can be serviced with QoS
- **Attribute Base Performance Monitoring**
Measuring network performance by attributes

Finding WebEx in an Encrypted Flow

Trace Shows TLS Encryption Between Host and WebEx Conference Bridge

Filter: `ip.src == 10.87.80.130 and ip.dst == 64.68.106.197` Expression... Clear Apply


No.	Time	Source	Destination	Protocol	Length	Info
1	23:18:35.584624	10.87.80.130	64.68.106.197	TLSv1	123	Application Data
34	23:18:35.942485	10.87.80.130	64.68.106.197	TCP	54	50402 > https [ACK] seq=1 Ack=70 win
36	23:18:35.949415	10.87.80.130	64.68.106.197	TLSv1	203	Application Data
46	23:18:36.108780	10.87.80.130	64.68.106.197	TLSv1	203	Application Data
47	23:18:36.108780	10.87.80.130	64.68.106.197	TLSv1	203	Application Data
385	23:18:41.722203	10.87.80.130	64.68.106.197	TCP	54	50402 > https [ACK] seq=1 Ack=666 wi
386	23:18:41.722472	10.87.80.130	64.68.106.197	TLSv1	203	Application Data

Frame 36: 203 bytes on wire (1624 bits), 203 bytes captured (1624 bits)

- Ethernet II, Src: WistronI_b3:05:4c (f0:de:f1:b3:05:4c), Dst: Cisco_6c:10:ff (1c:df:0f:6c:10:ff)
- Internet Protocol Version 4, Src: 10.87.80.130 (10.87.80.130), Dst: 64.68.106.197 (64.68.106.197)
- Transmission Control Protocol, Src Port: 50401 (50401), Dst Port: https (443), Seq: 70, Ack: 1, Len: 149
- Secure Sockets Layer
 - Secure Sockets Layer
 - TLSv1 Record Layer: Application Data Protocol: http
 - Content Type: Application Data (23)
 - Version: TLS 1.0 (0x0301)
 - Length: 144
 - Encrypted Application Data: 0d456dad45af1df5b2e31f1fbc38ed92181c949853746f52...

Metadata AppID with Media Monitoring

Integrating Flow Metadata with Performance Monitor Flow Record

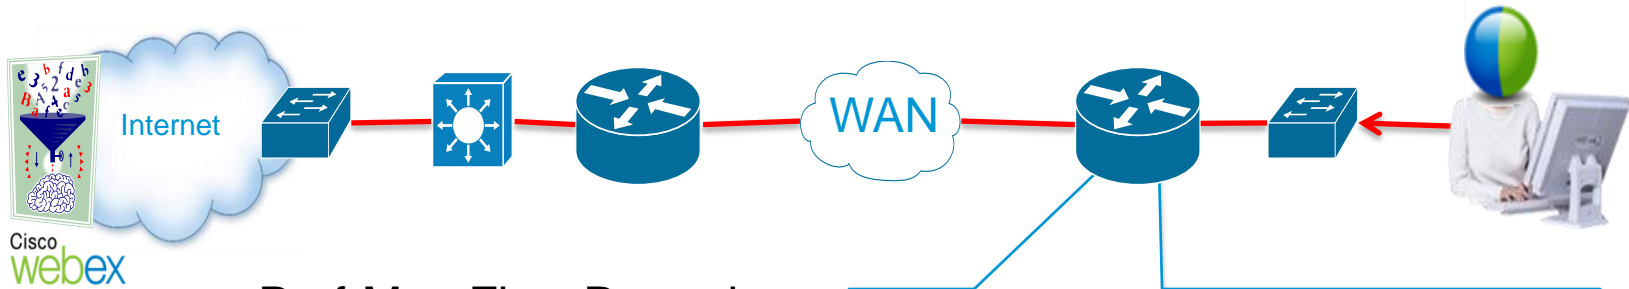

Perf-Mon Flow Records

Configures a custom Perf-Mon Flow Record name “webex-pm”

```
flow record type performance-monitor webex-pm
match ipv4 dscp
match ipv4 protocol
match ipv4 source address
match ipv4 destination address
match transport source-port
match transport destination-port
```


Collect Metadata Attributes

WebEx Session is **Encrypted**. Perf-Mon will collect statistics and Metadata Attributes into a single Flow Record.

```
collect application name
collect application version
collect application vendor
collect metadata global-session-id
collect metadata clock-rate
collect transport round-trip-time min
collect transport round-trip-time max
collect transport round-trip-time sum
```


Metadata AppID with Media Monitoring

Configure Cisco Policy Language to Use Flow Metadata

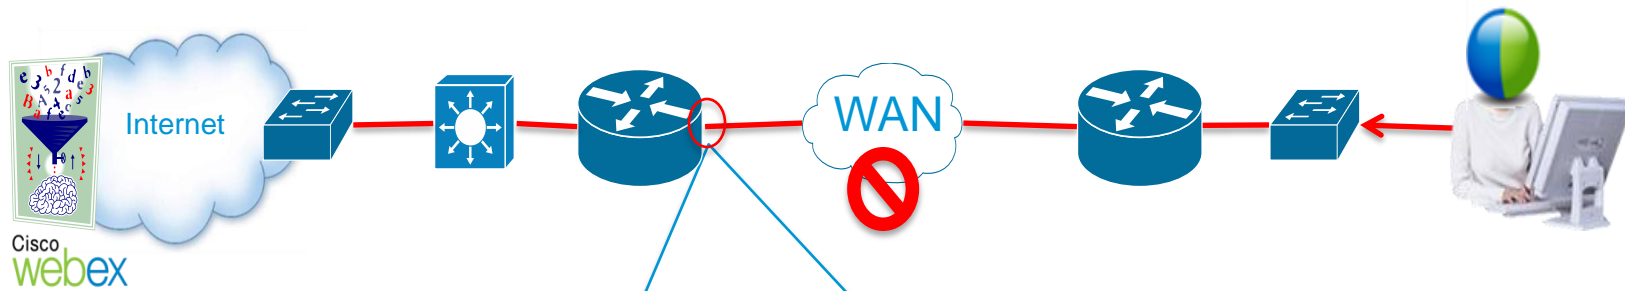

```
interface GigabitEthernet 0/0  
service-policy type performance-mon meta-perfmon out  
service-policy type performance-mon meta-perfmon in
```

```
class-map match-any webex-appid  
match application webex-meeting
```

```
policy-map type performance-monitor meta-perfmon  
class webex-appid  
flow monitor inline  
record webex-pm
```

Cisco Policy Language
Recognizes WebEx
Metadata

Class-map matches specific WebEx
Metadata Attributes

Create Policy (Perf-Mon)

Flow Monitor now Records Perf-Mon
metrics with Metadata Attributes

Metadata AppID with Media Monitoring

Integrating Performance Monitoring with Flow Metadata



```
isr3925-1#show performance monitor status
Match: ipv4 source address = 10.87.80.130, ipv4 destination address = 64.68.106.131, transport source-port = 51344,
transport destination-port = 443, ip dscp = 0x00, ip protocol = 6,
Policy: ipv4-v6-media, Class: webex-appid
```

```
transport round-trip-time (msec) : 344064
transport round-trip-time min (msec) : NA
transport round-trip-time max (msec) : NA
transport round-trip-time sum (msec) : NA
```

```
application version : T28
application vendor : Cisco Systems, Inc.
metadata global-session-id : NA
metadata clock-rate : 0
application id : webex-meeting
```

TCP 443
HTTP over SSL/TLS

Metadata Attributes

Take Away

- Operating IP Network for Video
 - Ensuring End to End QoS with Mediatrace
 - Performance Monitoring
- Application aware network
 - Targeted service treatment with pinpoint accuracy
 - Simple when the application provides description

Additional Resources

- Medianet Support forum - <https://supportforums.cisco.com/community/etc/medianet>
- Medianet on Cisco.com - <http://www.cisco.com/go/medianet>
 - Autoconfiguration: <http://www.cisco.com/go/autoconfiguration>
 - Media Monitoring: <http://www.cisco.com/go/mediamonitring>
 - MSI:
http://www.cisco.com/en/US/solutions/ns340/ns857/ns156/ns1094/media_services_interface.html
- Medianet Knowledge Base - <http://www.cisco.com/web/solutions/medianet/knowledgebase/index.html>
- SRND
http://www.cisco.com/en/US/solutions/ns340/ns414/ns742/ns819/landing_vid_medianet.html
- Medianet Blogs - <http://blogs.cisco.com/tag/medianet/>
- Cisco Developer Network for Medianet - <http://developer.cisco.com/web/mnets>

Polling Question 3

From scale 1 to 5, how complicated is your organization global QoS Policy?

- a) 1
- b) 2
- c) 3
- d) 4
- e) 5

What do Cisco Medianet, New York Yankees, and the Dallas Cowboys have all in common?

Digital Media Player 4310 (part of Medianet) is a digital signage device that let businesses display and distribute content. Digital signage has been a key part of Cisco's efforts in the sports arena business, where the company has played a role in such facilities as the new Yankees Stadium and the football stadiums for the N.Y. Giants, N.Y. Jets and Dallas Cowboys.

Q & A

Use the Q&A panel to continue asking your questions



We Appreciate Your Feedback!

Those who fill out the Evaluation Survey will enter a raffle for a free:

\$20 USD Gift Certificate

To complete the evaluation, please click on link provided in the chat or in the pop-up once the event is closed.

The survey is located at

<https://www.ciscofeedback.vovici.com/se.ashx?s=6A5348A728809430>

Ask The Experts Event (with Eric Yu)

If you have additional questions, you can ask them to the Eric. He will be answering questions from August 21st to August 31st.

<https://supportforums.cisco.com/community/netpro/ask-the-expert>

You can watch the video or read the Q&A 5 business days after the event at

<https://supportforums.cisco.com/community/netpro/ask-the-expert/webcasts>



Next Expert Series Webcast - Portuguese

Topic: Basic Tools for Troubleshooting Cisco Adaptive Security Appliances (ASAs)



Tuesday, August 28, at
11:00 a.m. Brasilia City
10:00 a.m. New York
3:00 p.m. Lisbon

Join Cisco Expert:

Davi Garcia (Cisco Support Engineer, TAC Brazil)

During this live event you will get an overview of the Cisco Adaptive Security Appliances (ASAs) with Cisco expert Davi Garcia. He will show how to troubleshoot common problems using basic tools such as packet-tracer and capture. Garcia will provide a live demo during the event.

Register for this live Webcast at

http://tools.cisco.com/gems/cust/customerSite.do?MET_HOD=E&LANGUAGE_ID=P&PRIORITY_CODE=4&SEMINAR_CODE=S16892

Next Expert Series Webcast - English

Topic: Cable Modem Termination Systems (CMTS): Architecture, Configuration, and Troubleshooting



Wednesday September 12, at
8:00 a.m. Pacific Time
11:00 a.m. New York
5:00 p.m. Paris

Join Cisco Expert:

Eric Bautista

During this live event you get an overview of the Cable Modem Termination Systems and will learn about common configurations and how to troubleshoot common issues

Registration for this live Webcast opens next week at

<https://supportforums.cisco.com/community/netpro/expert-corner#view=webcasts>

Ask the Expert Events – Current English



Topic: Setting up and troubleshooting WCCP on IOS

Join Cisco Experts: **Peter Van Eynde** and **Michael Schueler**

Learn how to setup and troubleshoot WCCP (Web Cache Communication Protocol) on different IOS platforms
(This event runs until August 24th)



Topic: Understanding and Troubleshooting ACE Loadbalancer

Join Cisco Expert: **Sivakumar Sukumar**

Learn about configuration and troubleshooting on Cisco Application Control Engine (ACE) loadbalancer.
(This event runs until August 24th)



Topic: Preparing Cisco Unified Communications Manager 8.x to Support Cisco Jabber for Android/--iPhone

Join Cisco Expert: **Rajamani Nallakaruppan**

Learn to prepare Cisco Unified Communications Manager 8.x to Support Cisco Jabber for Android/--iPhone
(This event runs until August 28th)

Join the discussions of these Ask The Expert Events at:

<https://supportforums.cisco.com/community/netpro/expert-corner#view=ask-the-experts>

Ask the Expert Events – Starting Next Week English



Topic: RF Gateway 1 (RFGW 1) - Installation, Operation, and Troubleshooting

Join Cisco Experts: **Ron Hanson**

Learn ask questions about how to setup, operate and and troubleshoot RF Gateway 1



Topic: Intrusion Prevention System (IPS)

Join Cisco Expert: **Robert Albach**

Learn and ask questions about how to configure and trobleshoot IPS.

Join the discussions for these Ask The Expert Events at:

<https://supportforums.cisco.com/community/netpro/expert-corner#view=ask-the-experts>

(These events run from August 27th to September 7th)

We invite you to actively collaborate in the Cisco Support Community and social media

<https://supportforms.cisco.com>



<http://www.facebook.com/CiscoSupportCommunity>



http://twitter.com/#!/cisco_support



<http://www.youtube.com/user/ciscosupportchannel>



<https://plus.google.com/110418616513822966153?prsrc=3#110418616513822966153/posts>



<http://itunes.apple.com/us/app/cisco-technical-support/id398104252?mt=8>



https://play.google.com/store/apps/details?id=com.cisco.swtg_android



<http://www.linkedin.com/groups/CSC-Cisco-Support-Community-3210019>



Newsletter Subscription:

https://tools.cisco.com/gdrp/coiga/showsurvey.do?surveyCode=589&keyCode=146298_2&PHYSICAL%20FULFILLMENT%20Y/N=NO&SUBSCRIPTION%20CENTER=YES

We have communities in other languages

If you speak **Spanish, Portuguese, Japanese, Polish or Russian**, we invite you to ask your questions and collaborate in your language:

- Spanish → <https://supportforums.cisco.com/community/spanish>
- Portuguese → <https://supportforums.cisco.com/community/portuguese>
- Japanese → <https://supportforums.cisco.com/community/csc-japan>
- Polish → <https://supportforums.cisco.com/community/etc/netpro-polska>
- Russian → <https://supportforums.cisco.com/community/russian>

Thank You for Your Time

Please Take a Moment to Complete the Evaluation @

<https://www.ciscofeedback.vovici.com/se.ashx?s=6A5348A728809430>



Thank you.

