


Change Voice Mail Language

In this part we will see how to change our voice mail language to other different, we use Cisco Configuration Assistant version 2.2(6).


We need the files that will want to change the language; in my case I will use the Italian language pack UC500_8.2.0_locale_it_IT.rar.

And CUE installation package: SCUE-UC500-8.2.0.


1.- Beginning with access to CCA , in this part, we head to maintenance button and make click.

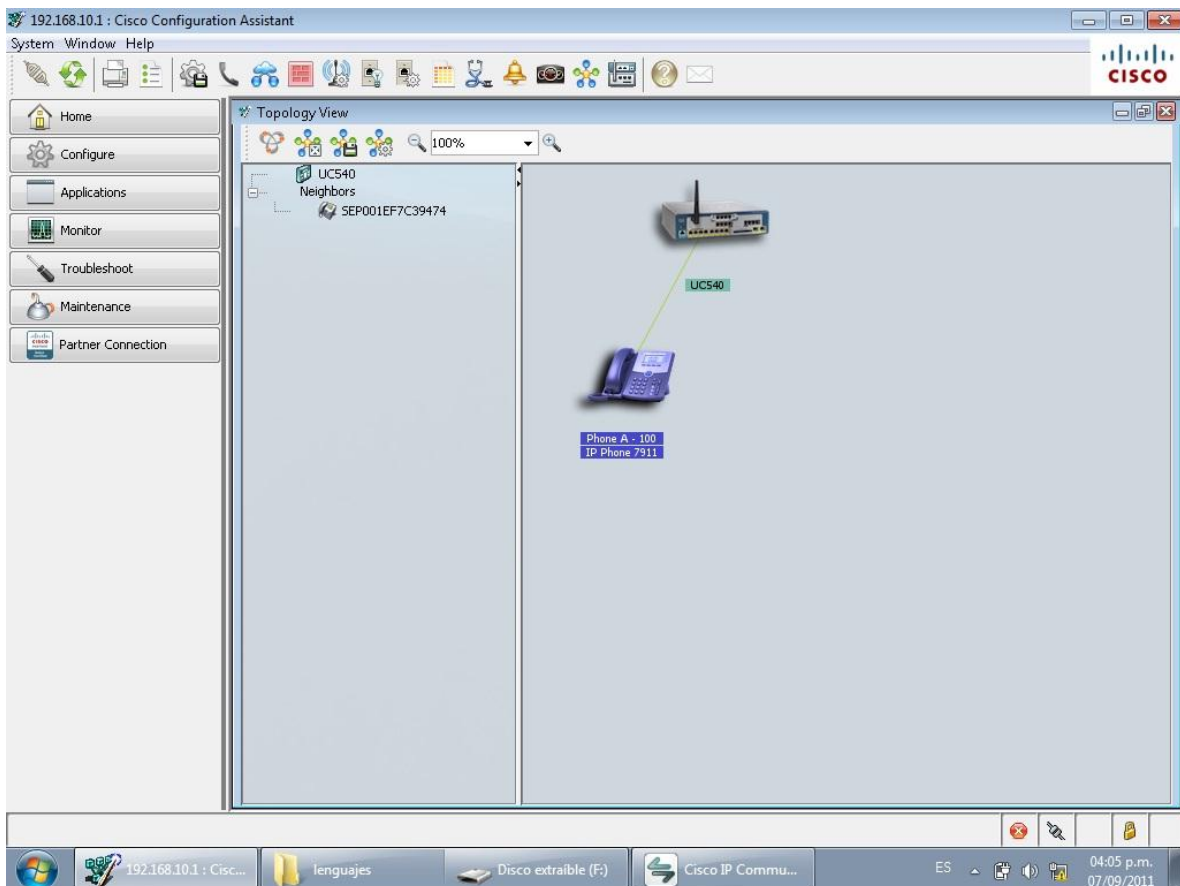



2.- After that , we head to “Software Upgrade” and make click

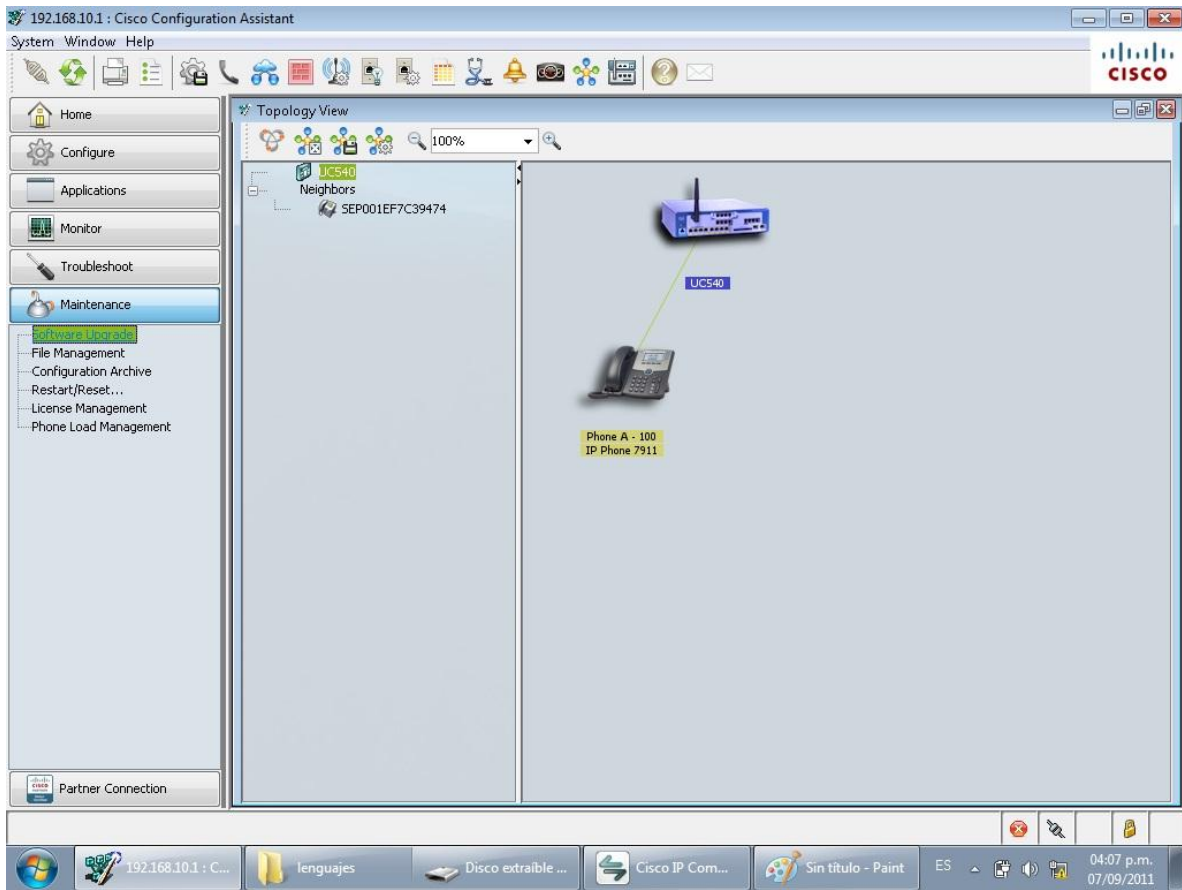



3.- A window will appear, where we list the devices that have, in my case is a UC540, device type, current version. And the down part a button named “Upgrade Settings”.

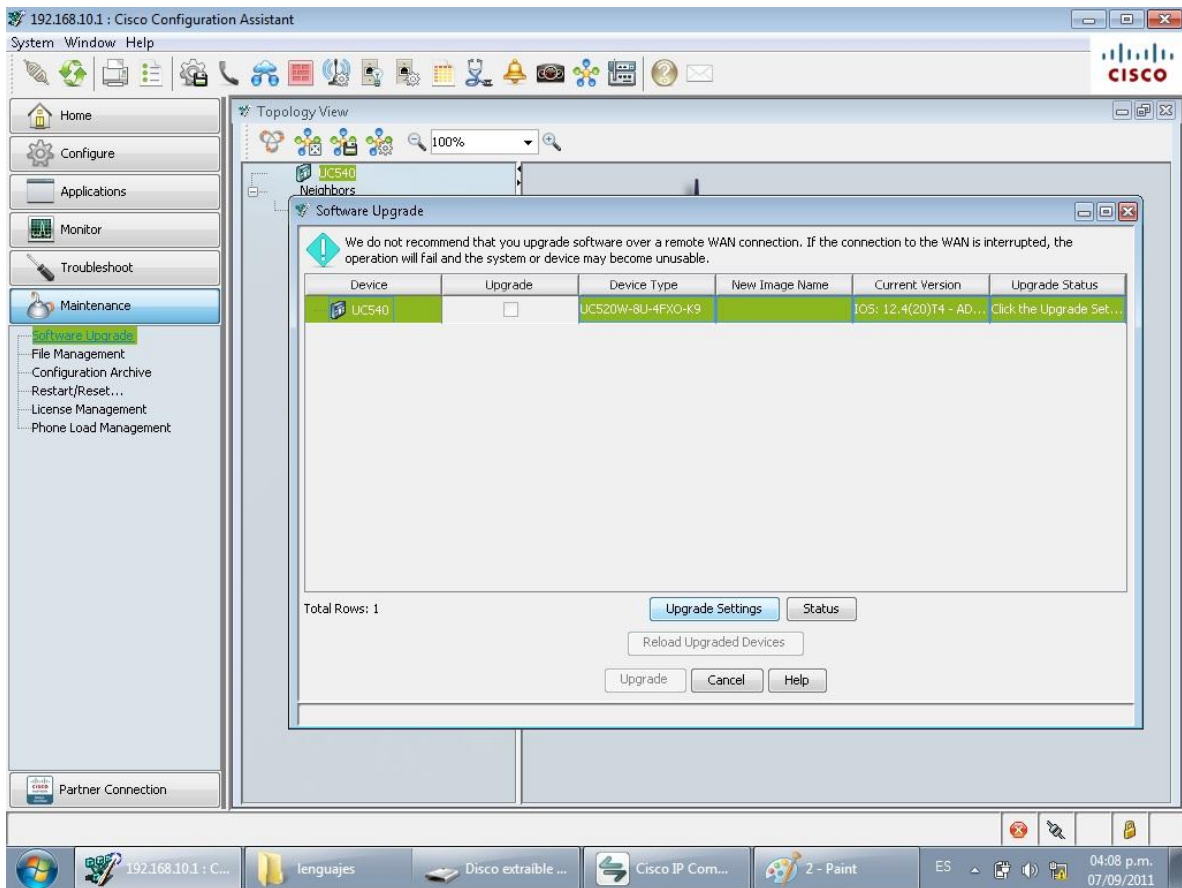



4.- The next windows is the “Upgrade Settings” where we can to upgrade the device , the system software, the IOS and CUE, we select the CUE option and appear the CUE window upgrade options.

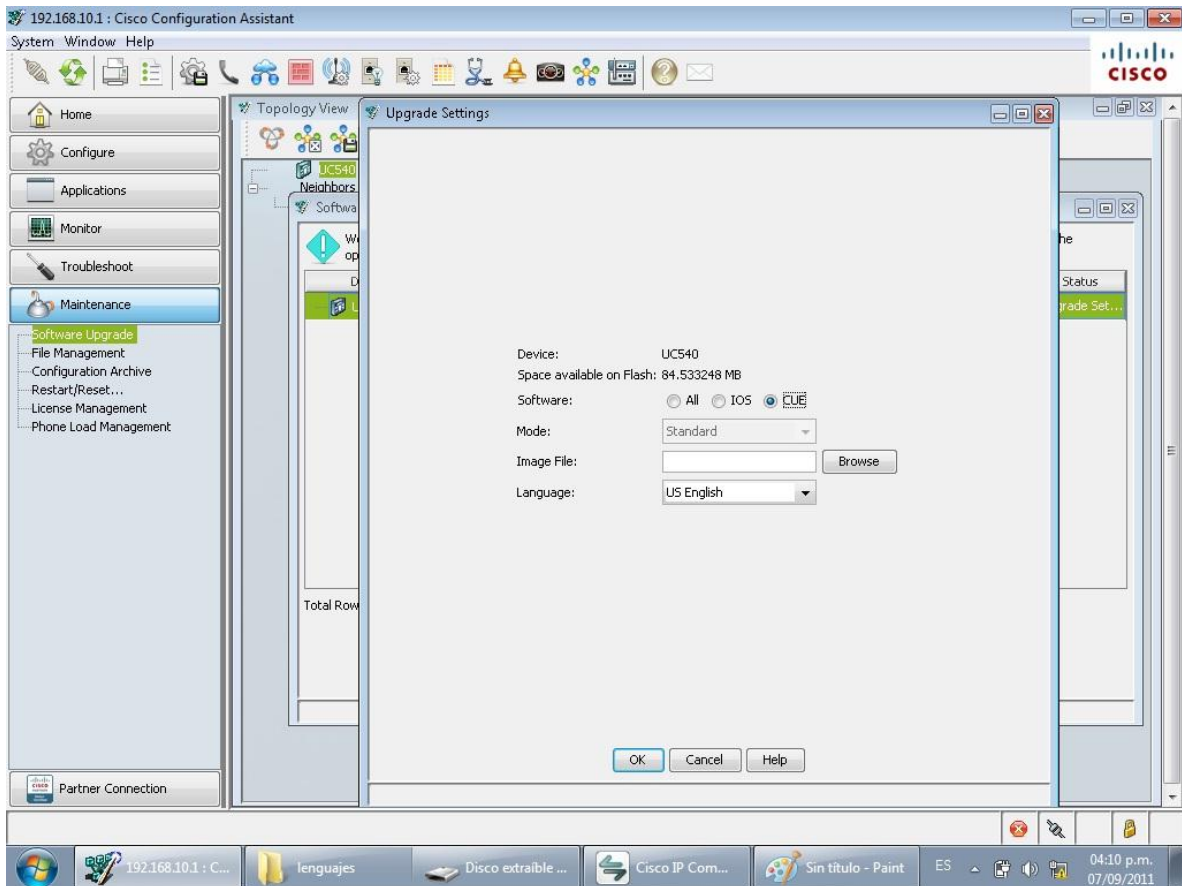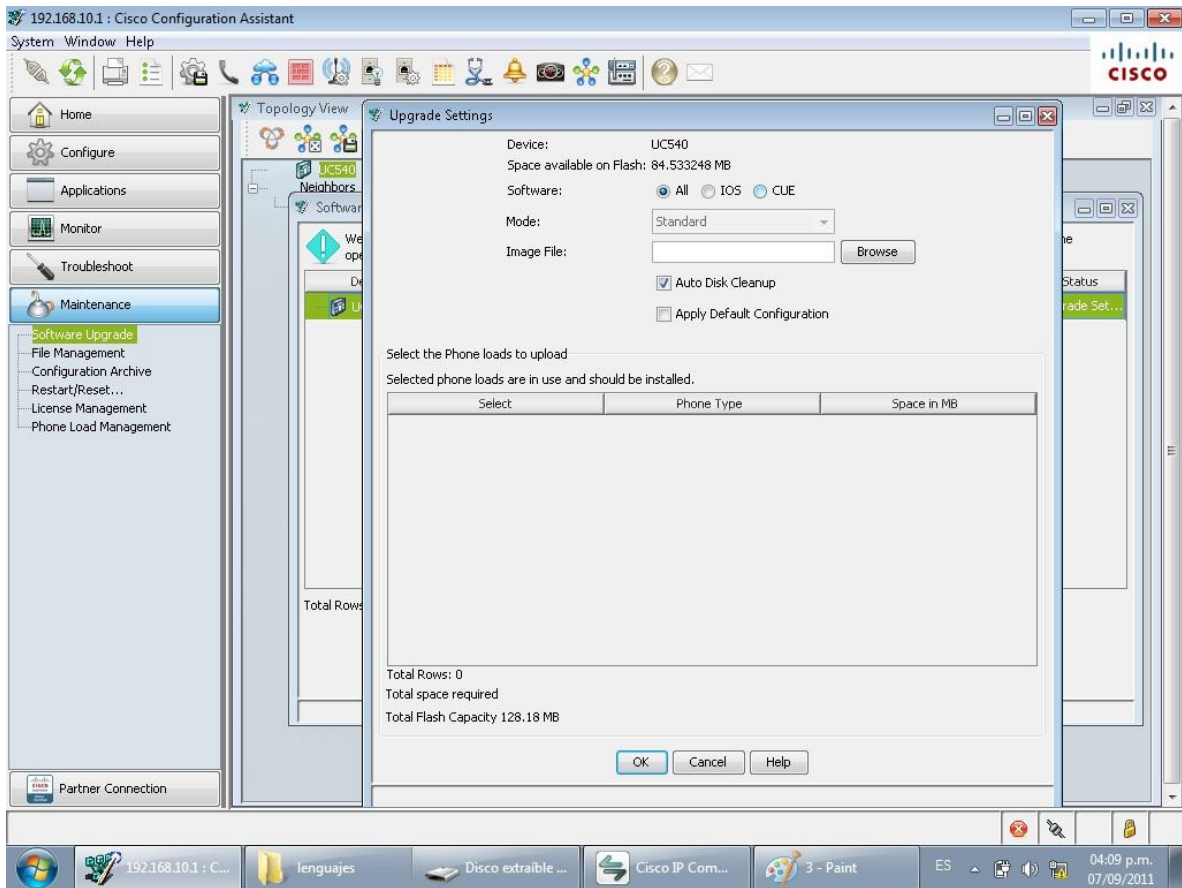



5.- Now , we Need the files to load, in any folder, put the files, first we will to extract the all files from the SCUE-UC500-8.2.0. pack. Then we will extract the files from the language pack, this package contain three folders: “English_United_States” “its” and “vm” which we interested us is the last one, that contain the voice mail language files, and extract these file in the same folder that SCUE package.

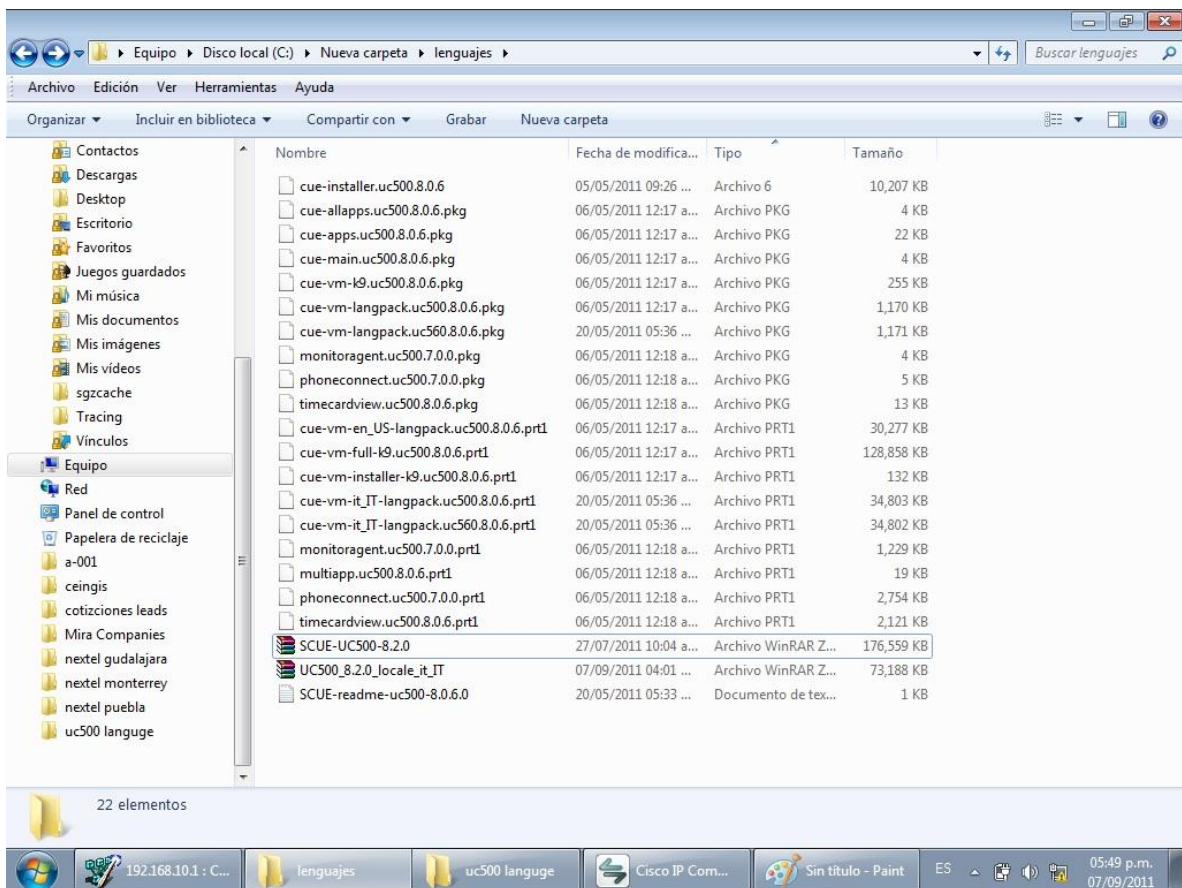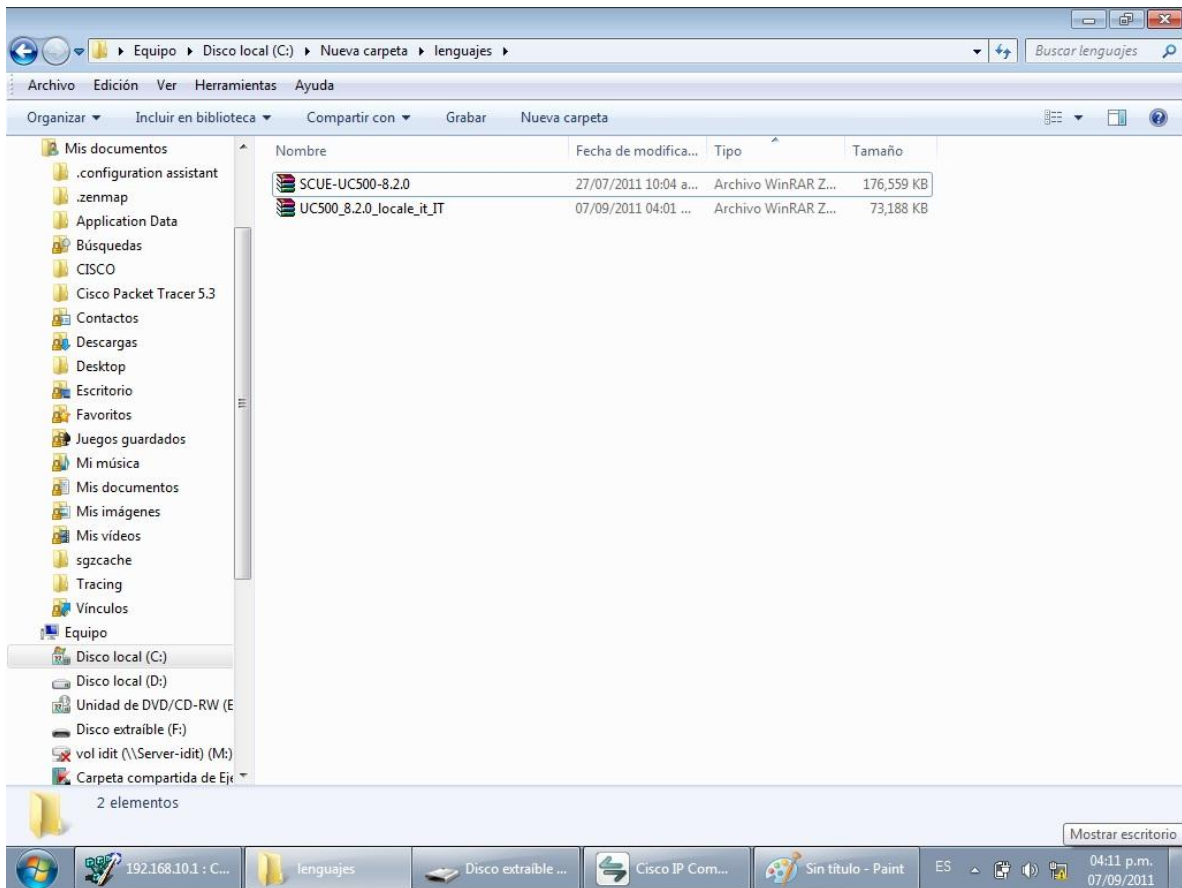


6.- In the part of "Image Files" we click on the "Browse" button, and search the folder containing the files and look for the one with the name "cue-main.uc500.8.0.6.pkg" and open button. After select the language , Italian.

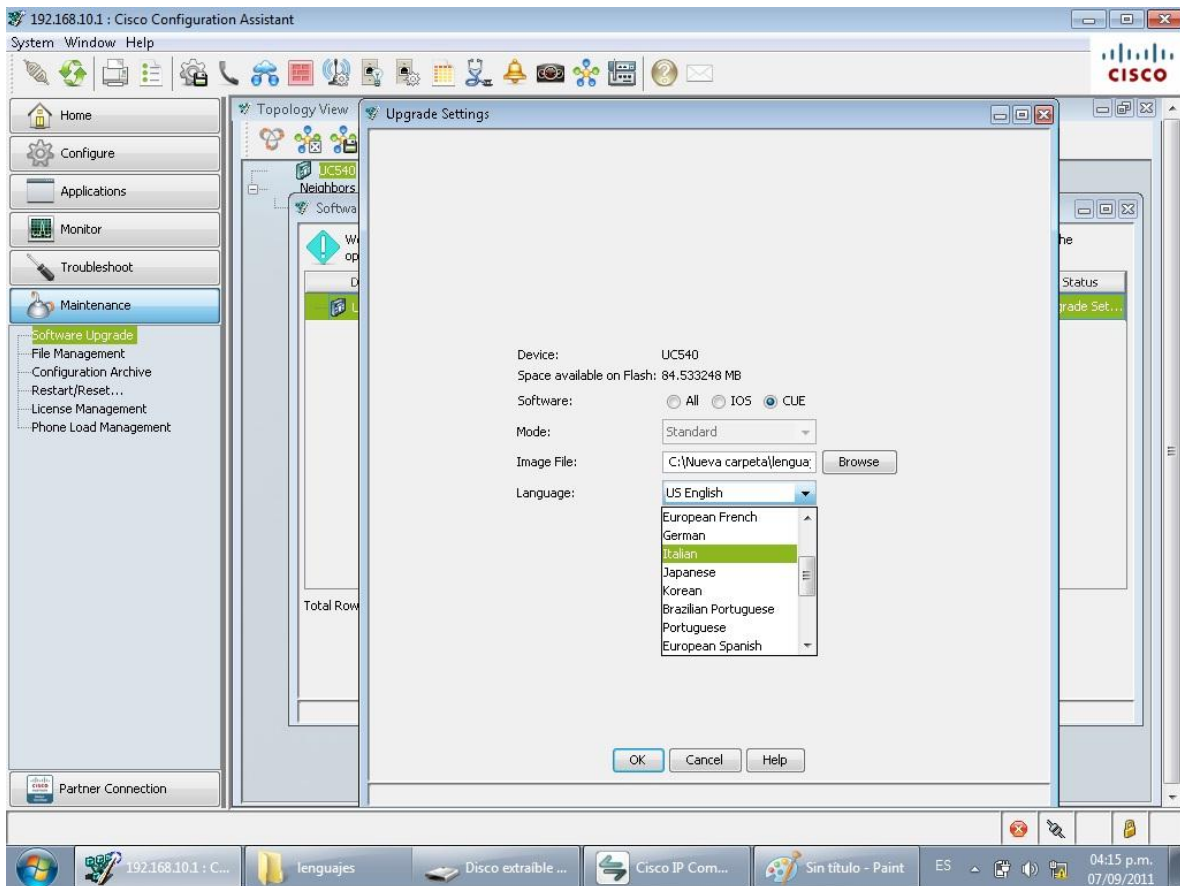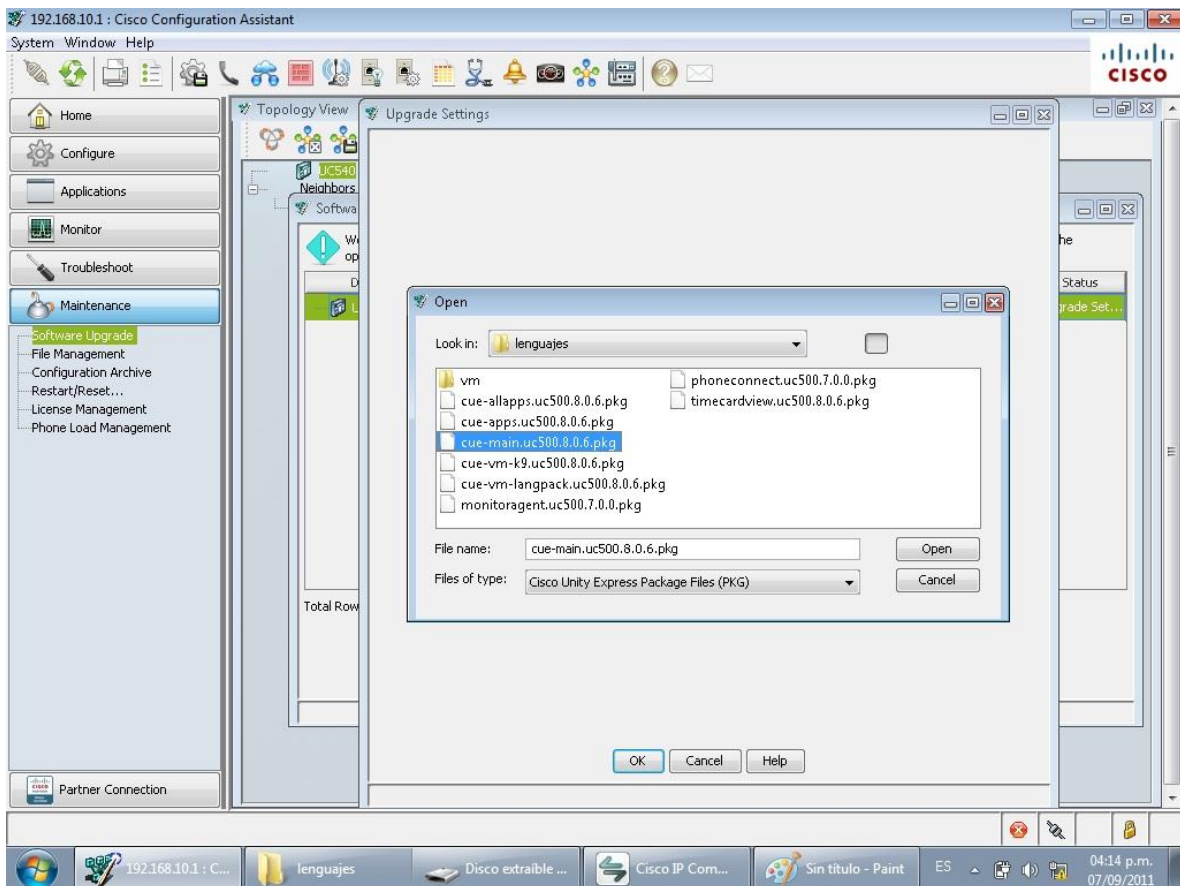

7.- Now, we appear 2 windows advices we click on yes button

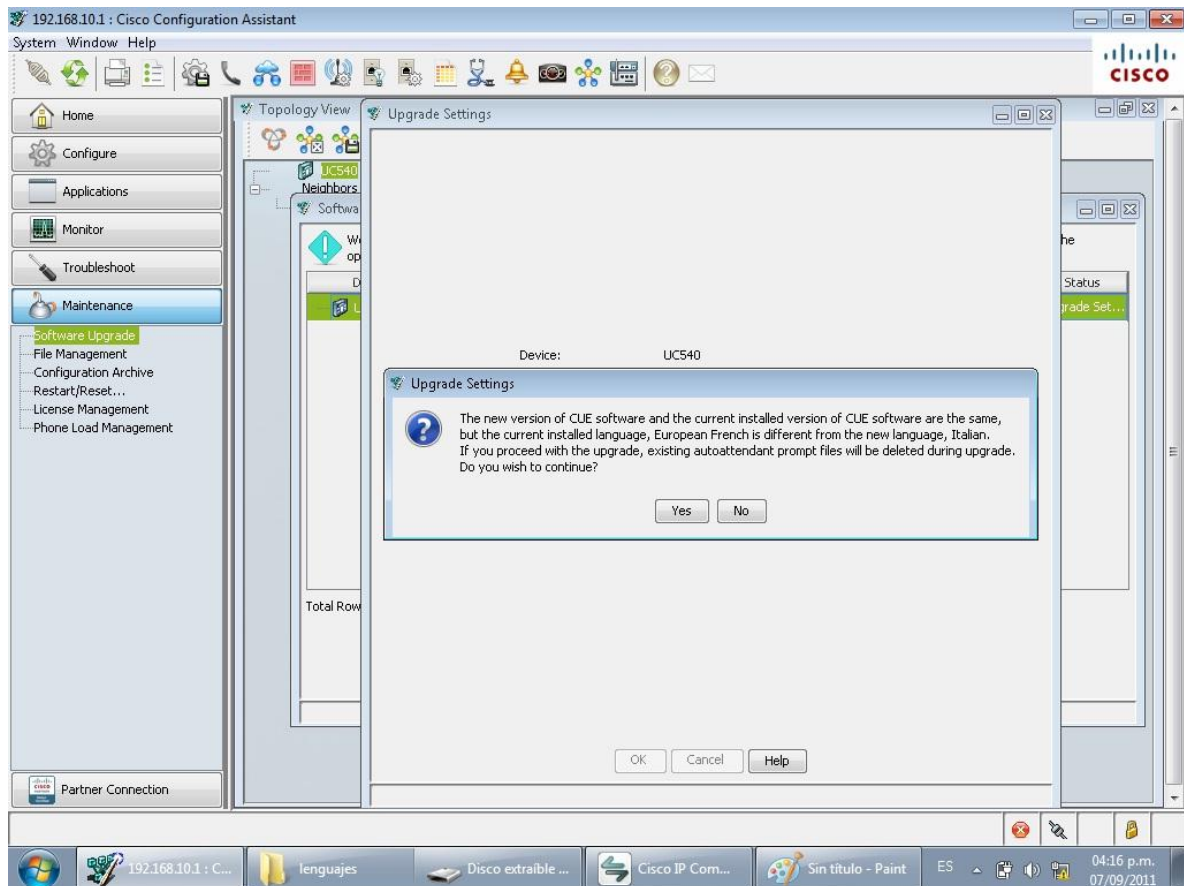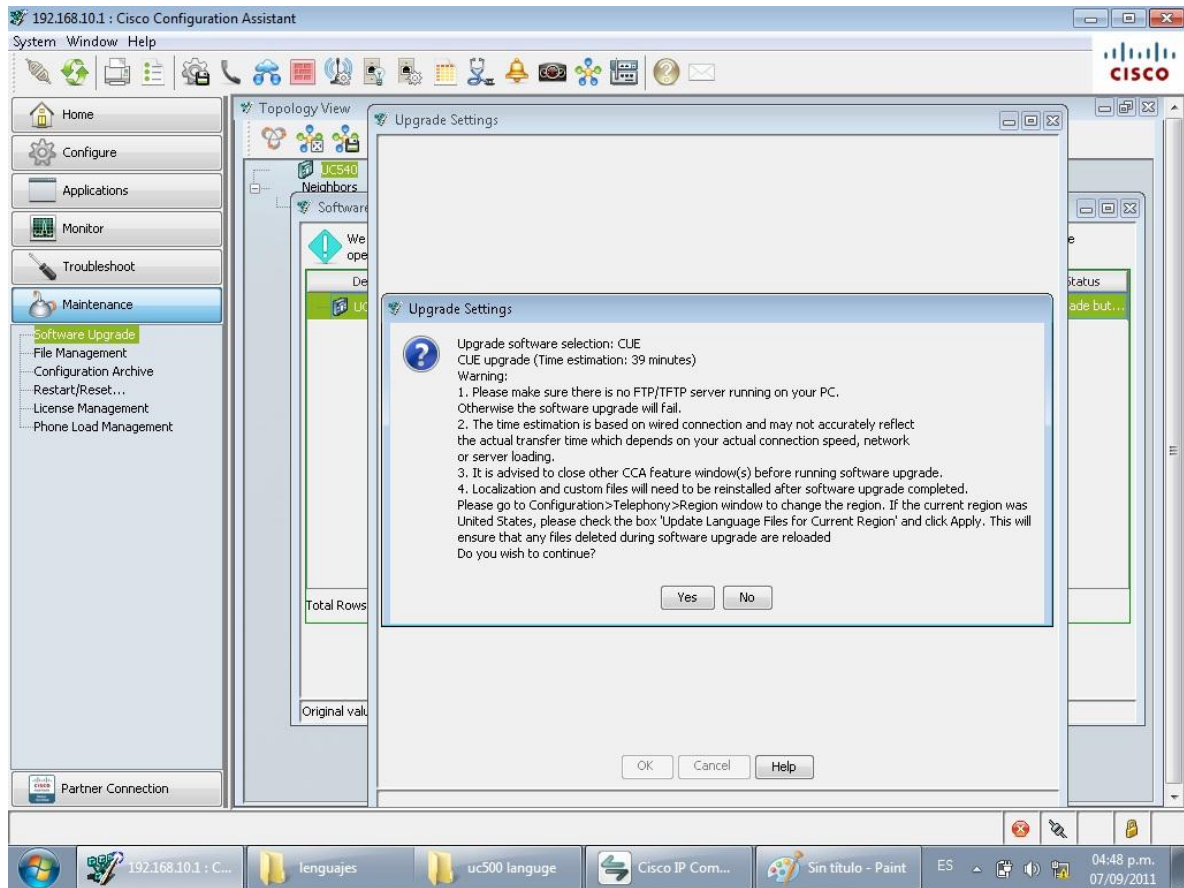

8.- Start the process

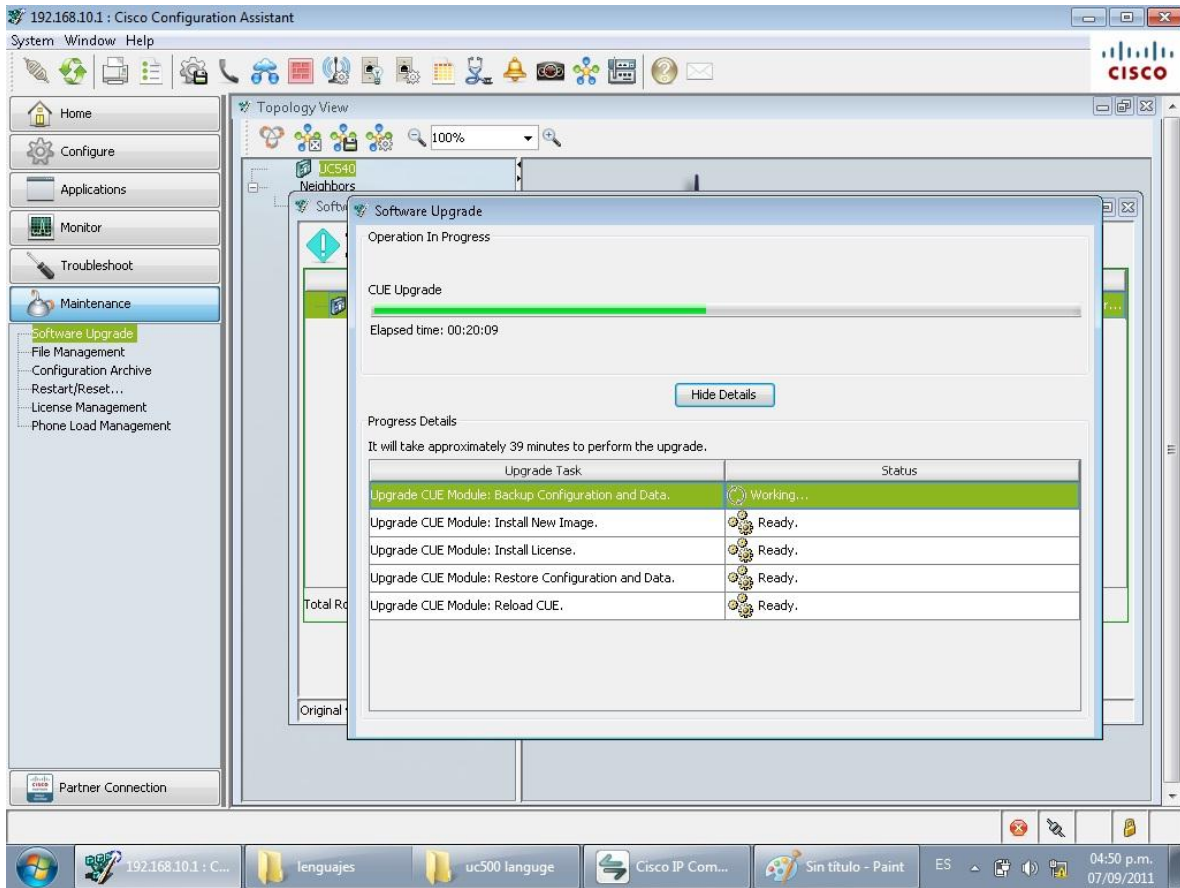

10.- At the end , we will have our voice mail in the chosen language.