Configuring a Logo on Cisco SPA303 and SPA5*0x* IP Phones

Check for updates of this document at:
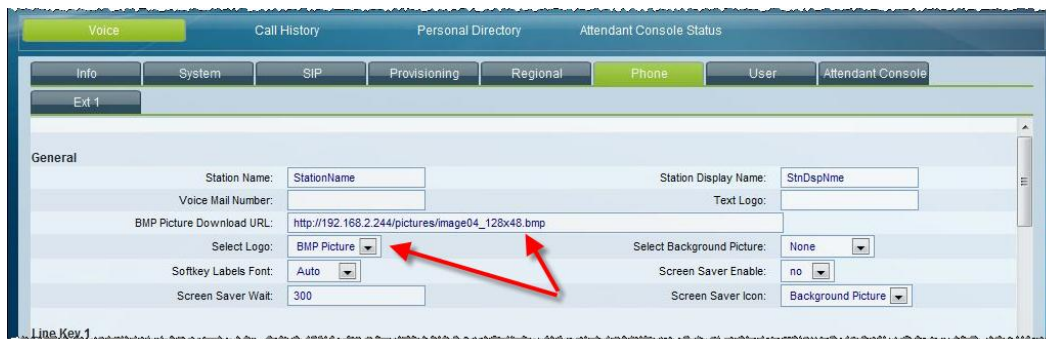https://supportforums.cisco.com/docs/DOC-13322

A logo can be text or a BMP image.

The BMP image must be 128 x 48 pixels by 1 bit deep.

The phones display the logo during the boot sequence. This means that the logo is only visible during a very short period after the Cisco logo displays and before the "Initializing Network" message is displayed.

Configure the SPA303, SPA502G, SPA504G, SPA508G, and SPA509G phones with the web-UI as follows:

1. `http://PhoneIP/admin/advanced` > Phone tab >

2. Insert the path to the image in the BMP Picture Download URL field. Example: `http://192.168.2.244/pictures/image04_128x48.bmp` [can also use TFTP]

3. Change Select Logo to BMP Picture

4. Click Submit all Changes

The phone will reboot, retrieve the bmp file and display it when it next boots.

Configuration File:

If using a configuration file, the contents should be similar to the following:

```
<BMP_Picture_Download_URL ua="na">http://192.168.2.244/pictures/image04_128x48.bmp</BMP_Picture_Download_URL>
<Select_Logo ua="na">BMP Picture</Select_Logo>
```

Troubleshooting:

Logo does not display.

Verify that you are using a 1-bit deep BMP image that is 128x48 pixels in size. A sample image is provided with this document.